OM SENI

1N4148WT / 1N4448WT / 1N914BWT
High Conductance Fast Switching Diode

Features


- Fast Switching Diode (Trr <4.0nsec)
- Flat Lead, Surface Mount Device Under 0.70mm Height
- Extremely Small Outline Plastic Package SOD523F
- Moisture Level Sensitivity 1
- Pb-free Version and RoHS Compliant
- Matte Tin (Sn) Lead Finish
- Green Mold Compound

Device Marking Code

Device Type	Device Marking
1N4148WT	E1
1N4448WT	E2
1N914BWT	E3



ELECTRICAL SYMBOL



SOD-523F
Band Indicates Cathode

Absolute Maximum Ratings* T_A=25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{RSM}	Non-Repetitive Peak Reverse Voltage	75	V
V_{RRM}	Repetitive Peak Reverse Voltage	75	V
I_{FRM}	Repetitive Peak Forward Current	300	mA
T_J	Operating Junction Temperature Range	-55 to +150	°C
T_{STG}	Storage Temperature Range	-55 to +150	°C

* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:
1) These ratings are based on a maximum junction temperature of 150 degrees C.
2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics

Symbol	Parameter	Value	Units
P_D	Power Dissipation (T_C=25°C)	200	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	500	°C/W


* Device mounted on FR-4 PCB minimum land pad.


Electrical Characteristics T_A=25°C unless otherwise noted

Symbol	Parameter		Test Conditions	Min	Typ	Max	Units
BV_R	Breakdown Voltage		I_R = 100 μA I_R = 5 μA	100 75			V
I_R	Reverse Current		V_R = 20 V V_R = 75 V			25 5	nA μA
V_F	Forward Voltage	1N4448WT/ 914BWT 1N4148WT 1N4448WT/ 914BWT	I_F = 5 mA I_F = 10 mA I_F = 100 mA	0.62		0.72 1 1	V
C_O	Diode Capacitance		V_R = 0, f = 1 MHz			4	pF
T_{RR}	Reverse Recovery Time		I_F = 10 mA, V_R = 6.0 V I_{RR} = 1 mA, R_L = 100 Ω			4	nS

OM SENI


Typical Performance Characteristics

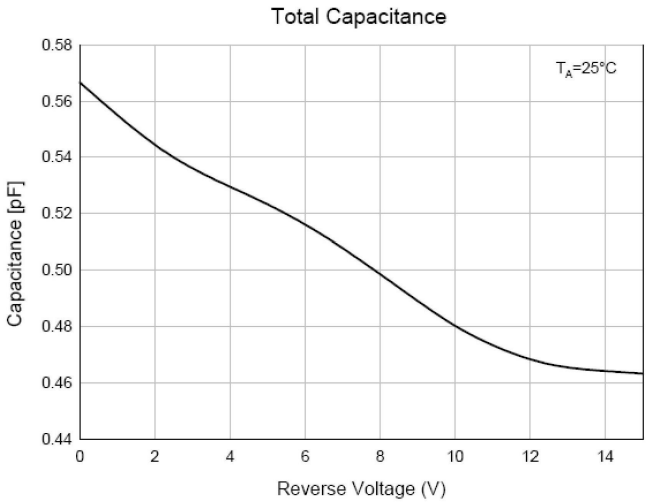


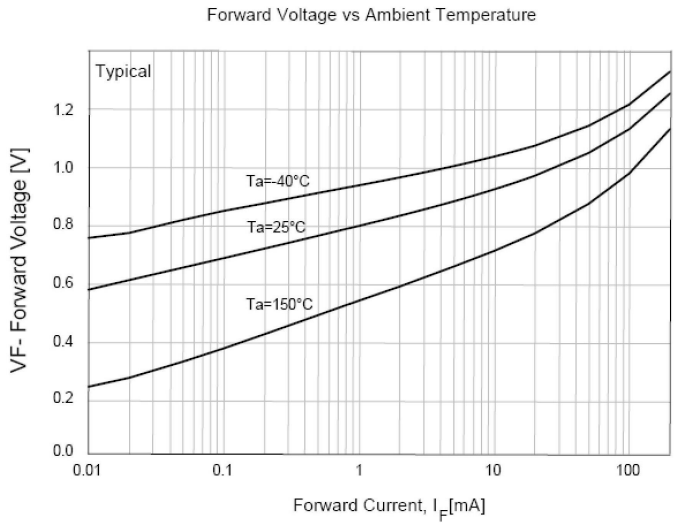


OM SENI

Typical Performance Characteristics (Continue)

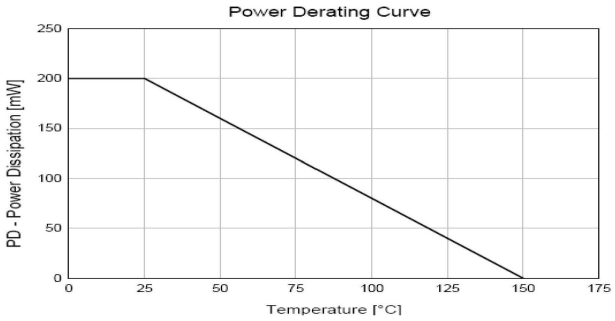

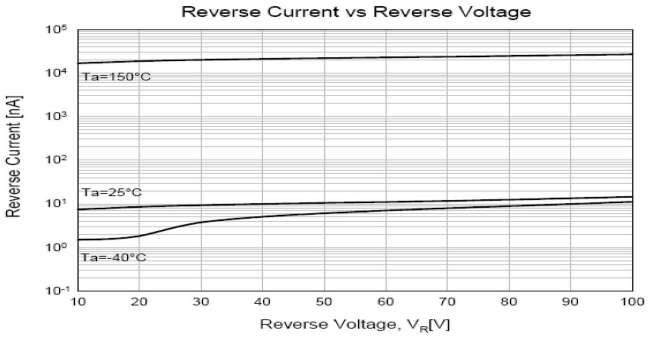

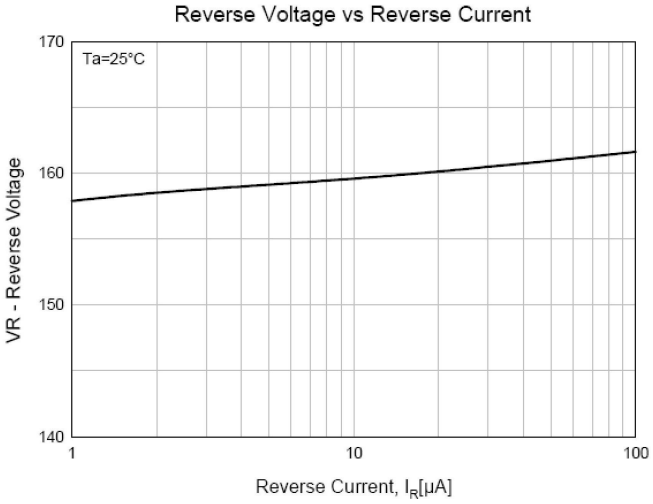


OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-523	R1	0.002	3000	30000	240000	7"

Package Outline Dimensions (SOD-523)

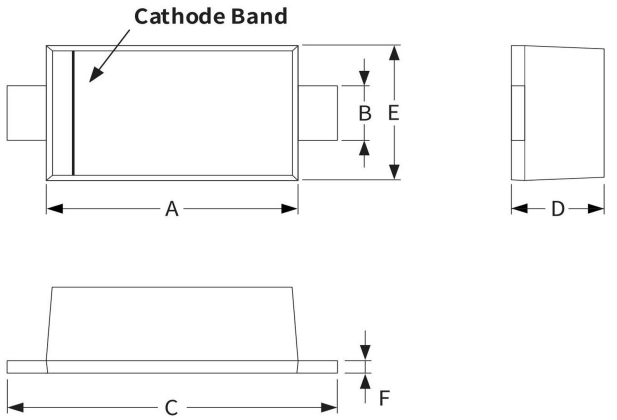

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	1.10	1.30	0.043	0.051
B	0.25	0.35	0.010	0.014
C	1.50	1.70	0.059	0.067
D	0.50	0.70	0.020	0.027
E	0.70	0.90	0.027	0.035
F	0.05	0.20	0.002	0.008

Suggested Pad Layout

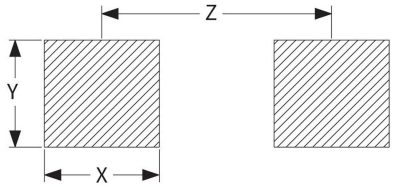

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
X	0.55	0.65	0.022	0.026
Y	0.65	0.75	0.026	0.029
Z	1.37	1.47	0.054	0.058