OM SENI

AOD242

40V N-Channel MOSFET

General Description


The AOD242 uses trench MOSFET technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$, Ciss and Coss. This device is ideal for boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.


Product Summary

V_{DS}	40V
I_D (at V_{GS}=10V)	54A
$R_{DS(ON)}$ (at V_{GS}=10V)	< 5.8mΩ
$R_{DS(ON)}$ (at V_{GS}=4.5V)	< 8.2mΩ

100% UIS Tested
100% R_g Tested

TO252
DPAK

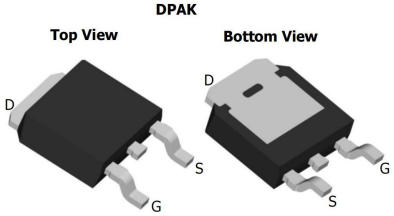



Orderable Part Number	Package Type	Form	Minimum Order Quantity
	TO-252	Tape & Reel	2500

Absolute Maximum Ratings T_A=25℃ unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	40	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current [G]	T_C=25℃	I_D	54	A
	T_C=100℃		42	
Pulsed Drain Current [C]		I_{DM}	165	
Continuous Drain Current	T_A=25℃	I_{DSM}	14.5	A
	T_A=70℃		11.5	
Avalanche Current [C]		I_{AS}	40	A
Avalanche energy L=0.1mH [C]		E_{AS}	80	mJ
Power Dissipation [B]	T_C=25℃	P_D	53.5	W
	T_C=100℃		26.5	
Power Dissipation [A]	T_A=25℃	P_{DSM}	2.5	W
	T_A=70℃		1.6	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 175	℃

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	15	20	℃/W
Maximum Junction-to-Ambient [A D]	Steady-State		41	50	℃/W
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	2.2	2.8	℃/W

OM SENI

Electrical Characteristics (T_J=25℃ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250μA, V_{GS}=0V	40			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=40V, V_{GS}=0V			1	μA
		T_J=55℃			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±20V			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250μA	1.3	1.8	2.3	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	165			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=20A		4.7	5.8	mΩ
		T_J=125℃		7.9	9.5	
		V_{GS}=4.5V, I_D=20A		6.4	8.2	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=20A		70		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.7	1	V
I_S	Maximum Body-Diode Continuous Current [G]				54	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=20V, f=1MHz		1350		pF
C_{oss}	Output Capacitance			405		pF
C_{rss}	Reverse Transfer Capacitance			26		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz	1	2	3	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=20V, I_D=20A		19	28	nC
Q_g(4.5V)	Total Gate Charge			8	12	nC
Q_{gs}	Gate Source Charge			4.5		nC
Q_{gd}	Gate Drain Charge			2.3		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=20V, R_L=1Ω, R_{GEN}=3Ω		6		ns
t_r	Turn-On Rise Time			2.5		ns
$t_{D(off)}$	Turn-Off DelayTime			23		ns
t_f	Turn-Off Fall Time			4		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=20A, dI/dt=500A/μs		15.5		ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=20A, dI/dt=500A/μs		31		nC

A. The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25° C. The Power dissipation P_{DSM} is based on $R_{\theta JA}$ and the maximum allowed junction temperature of 150° C. The value in any given application depends on the user's specific board design, and the maximum temperature of 175° C may be used if the PCB allows it.
B. The power dissipation P_D is based on $T_{J(MAX)}$=175° C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=175° C. Ratings are based on low frequency and duty cycles to keep initial T_J =25° C.
D. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.
E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$=175° C. The SOA curve provides a single pulse rating.
G. The maximum current rating is package limited.
H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C.

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

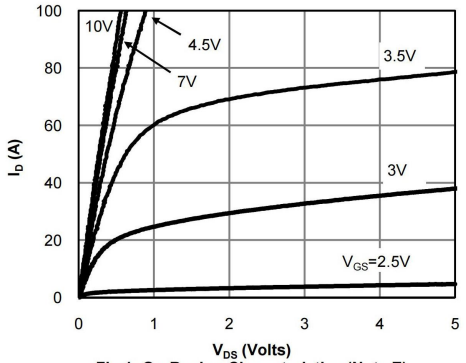


Fig 1: On-Region Characteristics (Note E)

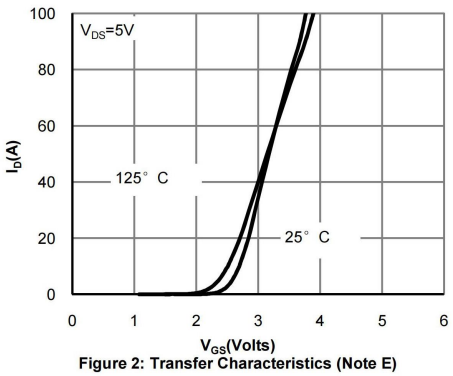


Figure 2: Transfer Characteristics (Note E)

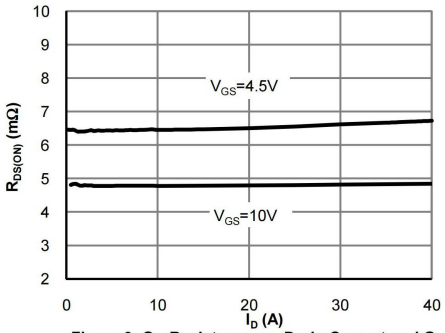


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

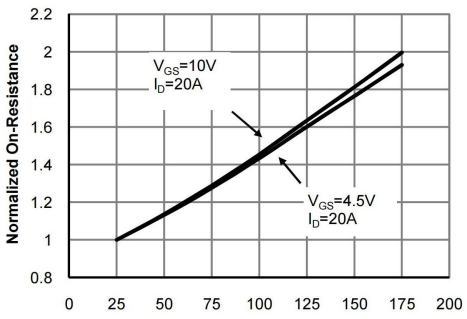


Figure 4: On-Resistance vs. Junction Temperature (Note E)

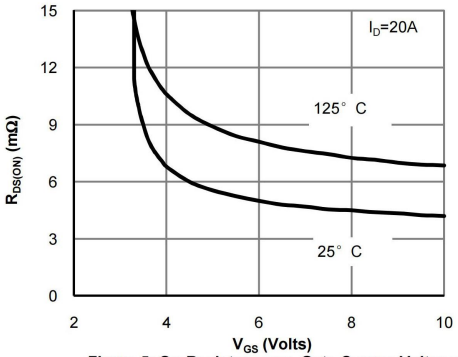


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

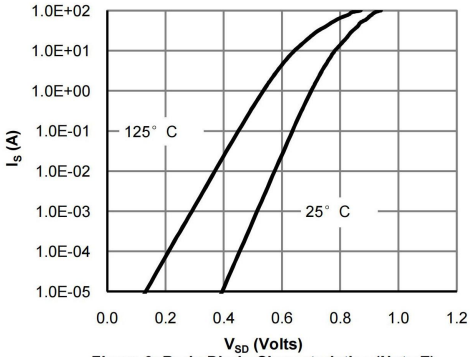


Figure 6: Body-Diode Characteristics (Note E)

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

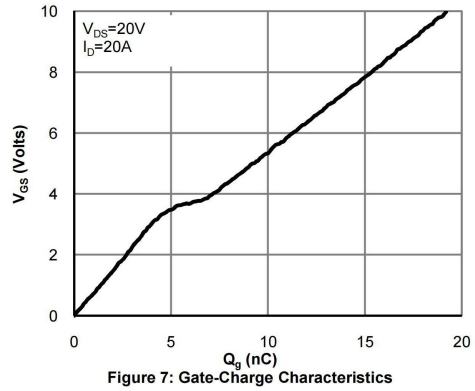


Figure 7: Gate-Charge Characteristics

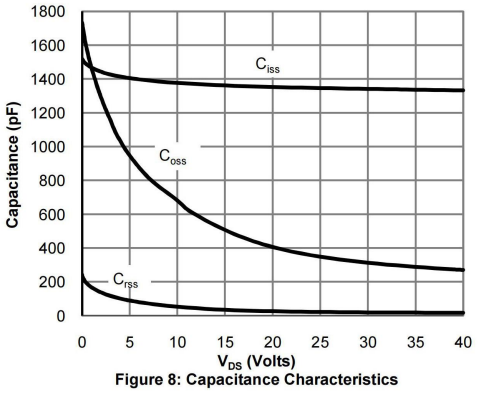


Figure 8: Capacitance Characteristics

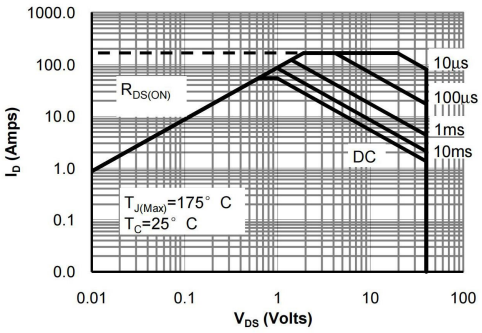


Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

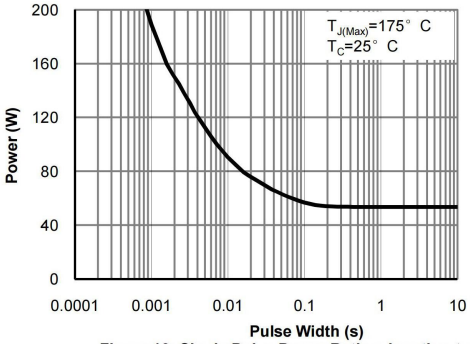


Figure 10: Single Pulse Power Rating Junction-to-Ca (Note F)

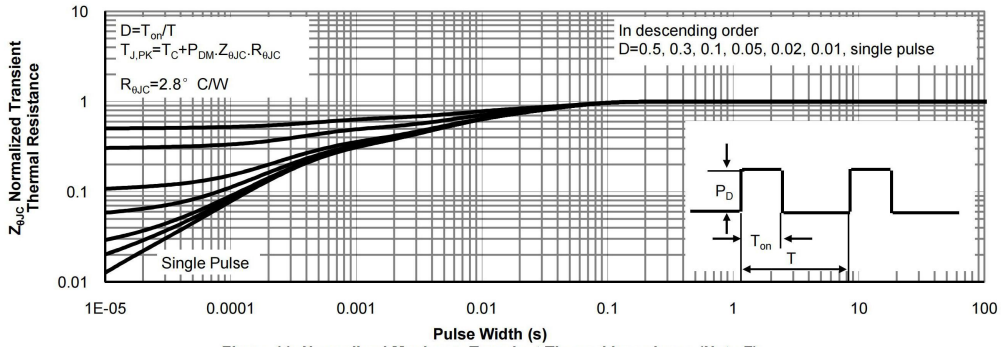


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

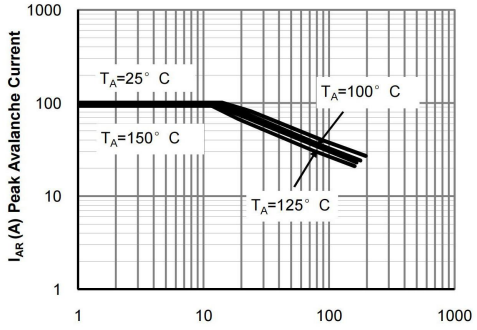


Figure 12: Single Pulse Avalanche capability (Note C)

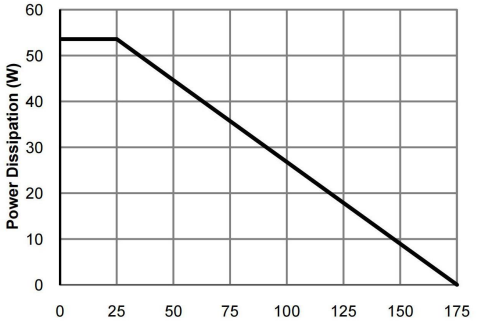


Figure 13: Power De-rating (Note F)

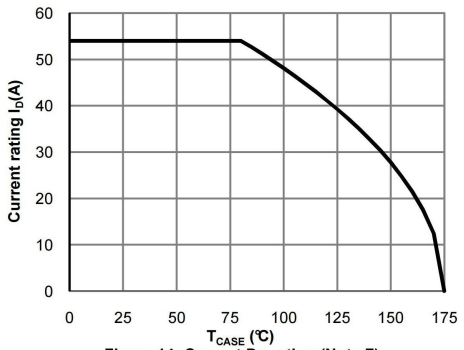


Figure 14: Current De-rating (Note F)

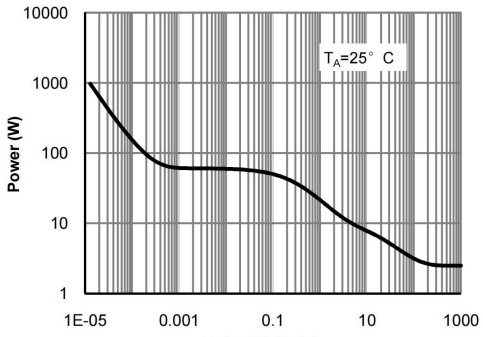


Figure 15: Single Pulse Power Rating Junction-to-Ambient (Note H)


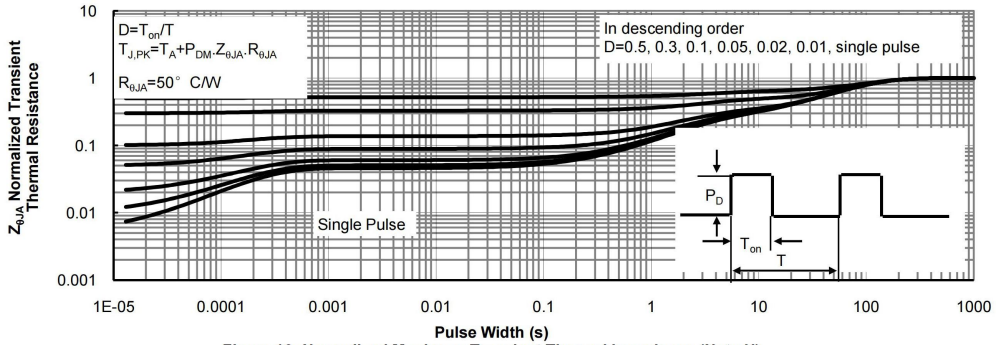



Figure 16: Normalized Maximum Transient Thermal Impedance (Note H)

OM SENI


Gate Charge Test Circuit & Waveform

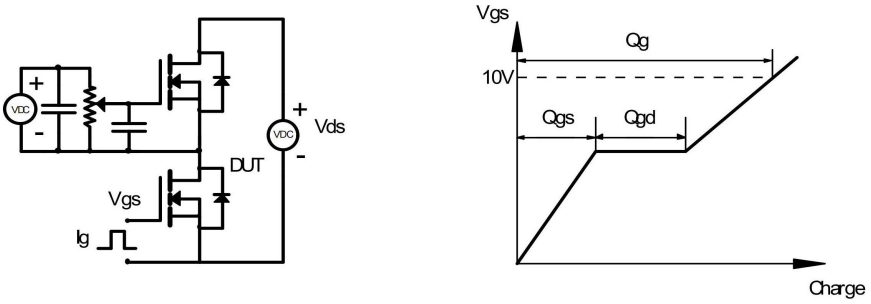

Resistive Switching Test Circuit & Waveforms

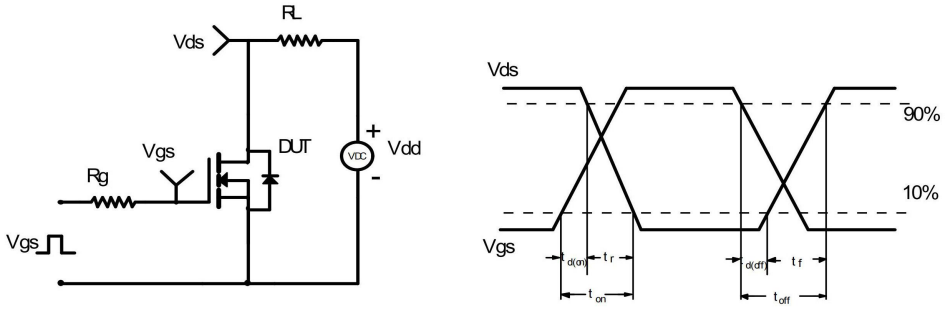

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

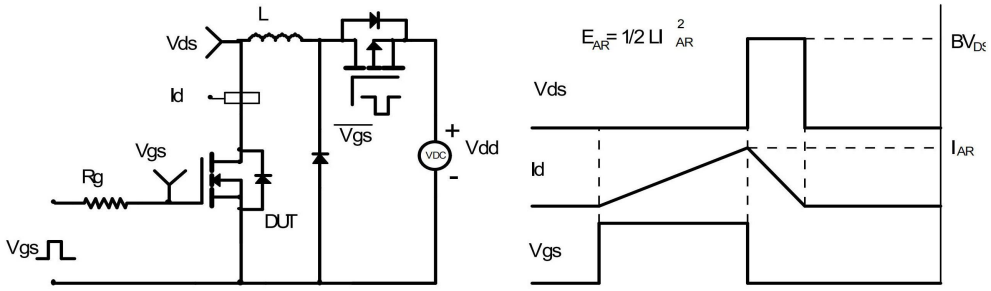

Diode Recovery Test Circuit & Waveforms

