www.omseni.com

OM SENI

BAT54LT1G
Schottky Barrier Diodes


These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

- Extremely Fast Switching Speed
- Low Forward Voltage − 0.35 Volts (Typ) @ I_F = 10 mAdc
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant


MAXIMUM RATINGS (T_J = 125°C unless otherwise noted)

Rating	Symbol	Value	Unit
Reverse Voltage	V_R	30	Volts
Forward Power Dissipation @ T_A = 25°C Derate above 25°C	P_F	 200 2.0	 mW mW/°C
Forward Current (DC)	I_F	200 Max	mA
Non−Repetitive Peak Forward Current t_p < 10 msec	I_{FSM}	600	mA
Repetitive Peak Forward Current Pulse Wave = 1 sec, Duty Cycle = 66%	I_{FRM}	300	mA
Junction Temperature	T_J	−55 to +125	°C
Storage Temperature Range	T_{stg}	−55 to +150	°C


30 VOLTS
SILICON HOT−CARRIER DETECTOR AND SWITCHING DIODES



SOT−23 (TO−236)



MARKING DIAGRAM



JV3 = Device Code
M = Date Code
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or overbar may vary depending upon manufacturing location.


OM SENI

BAT54LT1G

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage (I_R = 10 μA)	$V_{(BR)R}$	30	–	–	Volts
Total Capacitance (V_R = 1.0 V, f = 1.0 MHz)	C_T	–	7.6	10	pF
Reverse Leakage (V_R = 25 V)	I_R	–	0.5	2.0	μAdc
Forward Voltage (I_F = 0.1 mA) (I_F = 1.0 mA) (I_F = 10 mA) (I_F = 30 mA) (I_F = 100 mA)	V_F	– – – – –	0.22 0.29 0.35 0.41 0.52	0.24 0.32 0.40 0.50 0.80	V
Reverse Recovery Time (I_F = I_R = 10 mAdc, $I_{R(REC)}$ = 1.0 mAdc, Figure 1)	t_{rr}	–	–	5.0	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

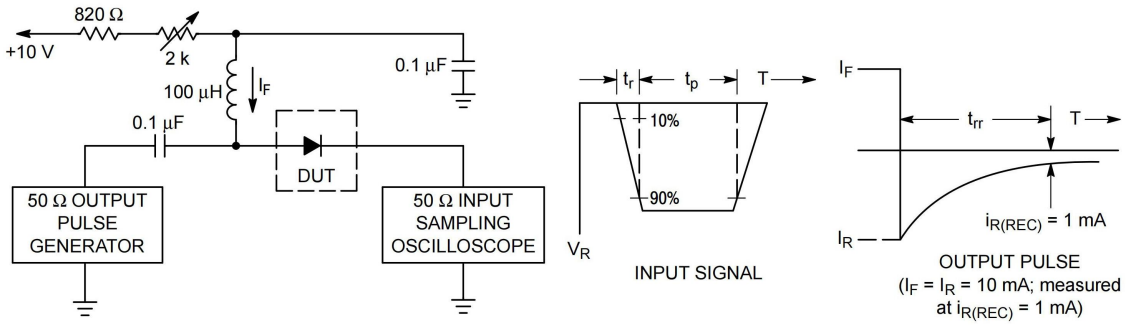

Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10 mA.
3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

OM SENI

BAT54LT1G

TYPICAL CHARACTERISTICS

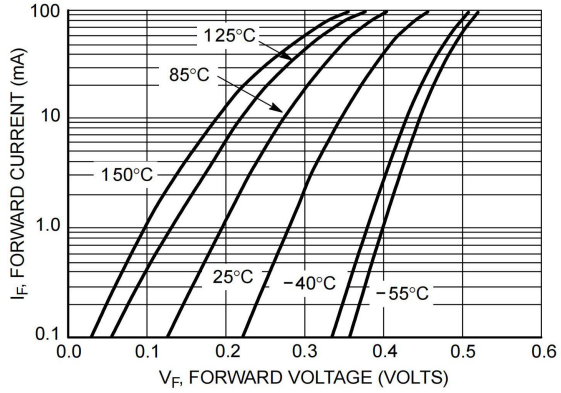


Figure 2. Forward Voltage

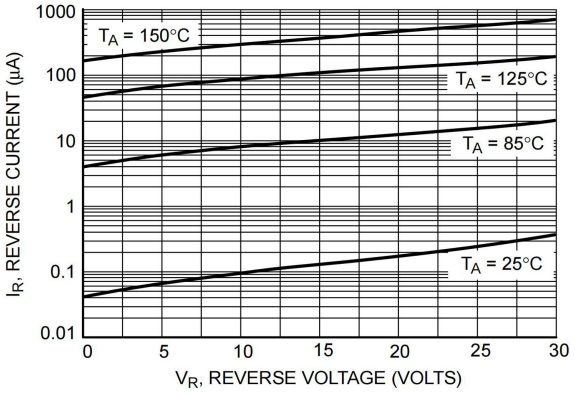


Figure 3. Leakage Current

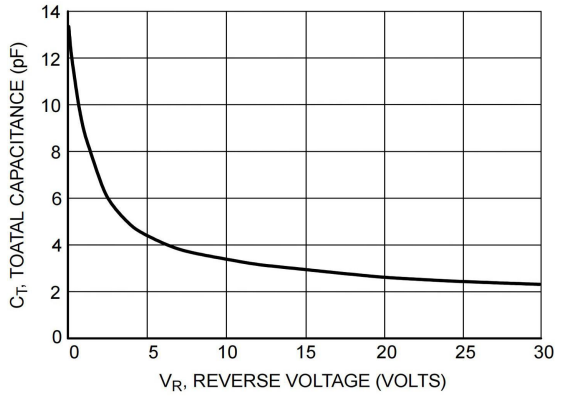



Figure 4. Total Capacitance

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	30000	240000	7''

Package Outline Dimensions (SOT-23)

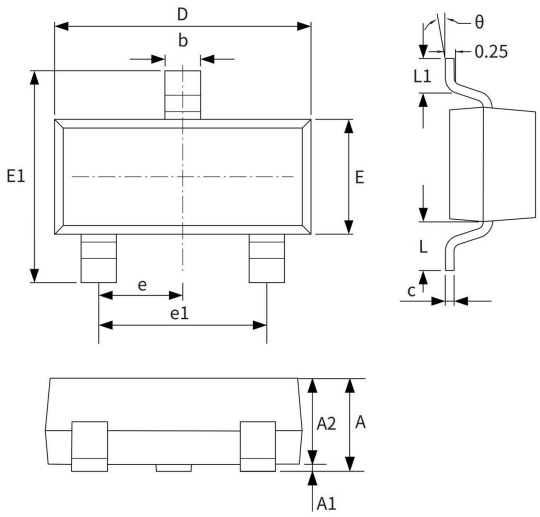

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

Suggested Pad Layout

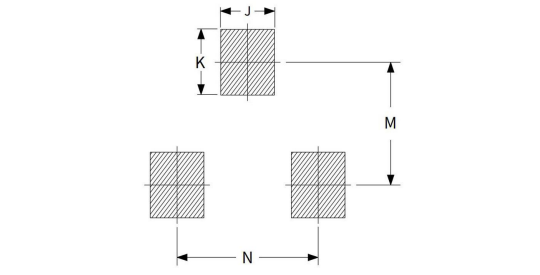

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.75	0.85	0.030	0.033
K	0.85	0.95	0.033	0.037
M	1.95	2.05	0.077	0.081
N	1.85	1.95	0.073	0.077