OM SENI

AO4435

30V P-Channel MOSFET

General Description


The AO4435 uses advanced trench technology to provide excellent $R_{DS(ON)}$, and ultra-low low gate charge with a 25V gate rating. This device is suitable for use as a load switch or in PWM applications.

-RoHS Compliant
-AO4435 is Halogen Free

Product Summary

V_{DS} = -30V
I_D = -10.5A (V_{GS} = -20V)
$R_{DS(ON)}$ < 14mΩ (V_{GS} = -20V)
$R_{DS(ON)}$ < 18mΩ (V_{GS} = -10V)
$R_{DS(ON)}$ < 36mΩ (V_{GS} = -5V)

100% UIS Tested
100% Rg Tested

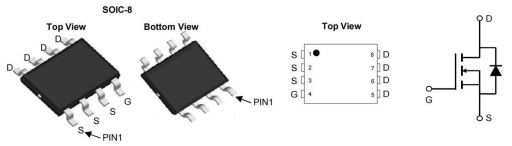

Orderable Part Number	Package Type	Form	Minimum Order Quantity
	SO-8	Tape & Reel	3000

Absolute Maximum Ratings T_A=25℃ unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	±25	V
Continuous Drain Current [A]	T_A=25℃	I_D	-10.5	A
	T_A=70℃		-8	
Pulsed Drain Current [B]		I_{DM}	-80	
Power Dissipation [A]	T_A=25℃	P_D	3.1	W
	T_A=70℃		2.0	
Avalanche Current [B]		I_{AR}	-20	A
Repetitive avalanche energy 0.3mH [B]		E_{AR}	60	mJ
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	℃

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	32	40	℃/W
Maximum Junction-to-Ambient [A]	Steady State		60	75	℃/W
Maximum Junction-to-Lead [C]	Steady State	$R_{\theta JL}$	17	24	℃/W

OM SENI

Electrical Characteristics (T_J=25℃ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D = -250μA, V_{GS} = 0V	-30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = -30V, V_{GS} = 0V			-1	μA
		T_J = 55℃			-5	
I_{GSS}	Gate-Body leakage current	V_{DS} = 0V, V_{GS} = ±25V			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS} I_D = -250μA	-1.7	-2.3	-3	V
$I_{D(ON)}$	On state drain current	V_{GS} = -10V, V_{DS} = -5V	-80			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS} = -20V, I_D = -11A		11	14	mΩ
		T_J=125℃		15	19	
		V_{GS} = -10V, I_D = -10A		15	18	
		V_{GS} = -5V, I_D = -5A		27	36	
g_{FS}	Forward Transconductance	V_{DS} = -5V, I_D = -10A		22		S
V_{SD}	Diode Forward Voltage	I_S = -1A,V_{GS} = 0V		-0.74	-1	V
I_S	Maximum Body-Diode Continuous Current				-3.5	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=-15V, f=1MHz		1130	1400	pF
C_{oss}	Output Capacitance			240		pF
C_{rss}	Reverse Transfer Capacitance			155		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz	1	5.8	8	Ω
SWITCHING PARAMETERS						
$Q_{g(10V)}$	Total Gate Charge	V_{GS}=-10V, V_{DS}=-15V, I_D=-10A		18	24	nC
$Q_{g(4.5V)}$	Total Gate Charge			9.5		
Q_{gs}	Gate Source Charge			5.5		nC
Q_{gd}	Gate Drain Charge			3.3		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=-10V, V_{DS}=-15V, R_L=1.5Ω, R_{GEN}=3Ω		8.7		ns
t_r	Turn-On Rise Time			8.5		ns
$t_{D(off)}$	Turn-Off DelayTime			18		ns
t_f	Turn-Off Fall Time			7		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=-10A, dI/dt=100A/μs		25	30	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=-10A, dI/dt=100A/μs		12		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A = 25℃. The value in any given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25℃. The SOA curve provides a single pulse rating.

F. The current rating is based on the t ≤ 10s thermal resistance rating.

G. E_{AR} and I_{AR} ratings are based on low frequency and duty cycles to keep T_j=25C.

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

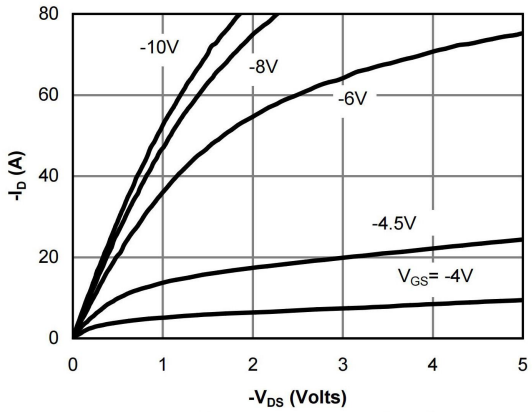


Figure 1: On-Region Characteristics

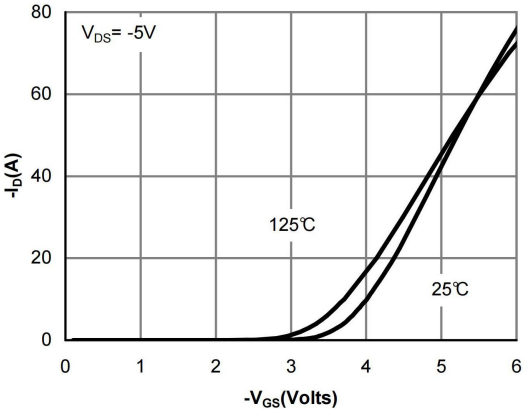


Figure 2: Transfer Characteristics

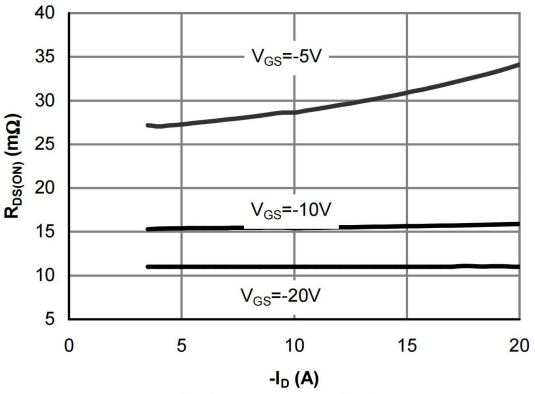


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

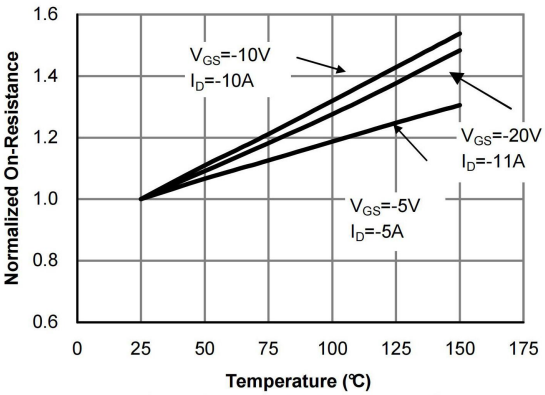


Figure 4: On-Resistance vs. Junction Temperature

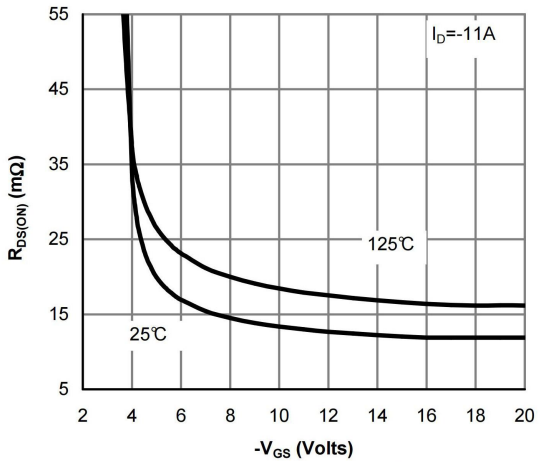


Figure 5: On-Resistance vs. Gate-Source Voltage

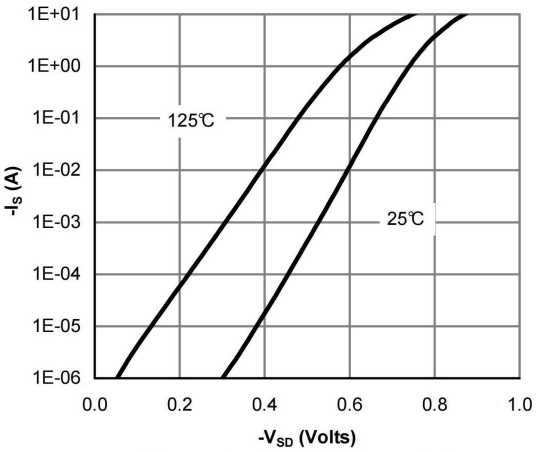


Figure 6: Body-Diode Characteristics

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

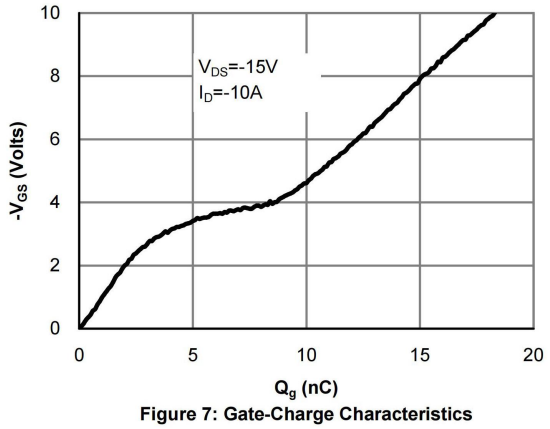


Figure 7: Gate-Charge Characteristics

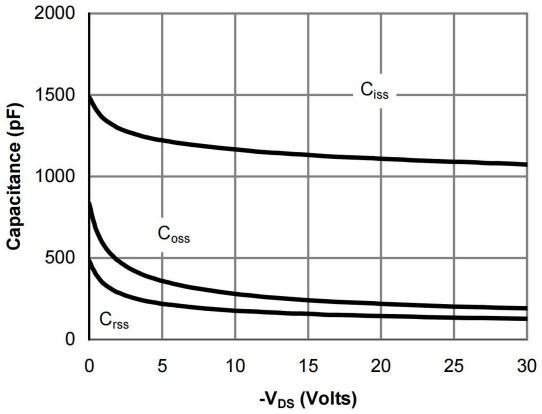


Figure 8: Capacitance Characteristics

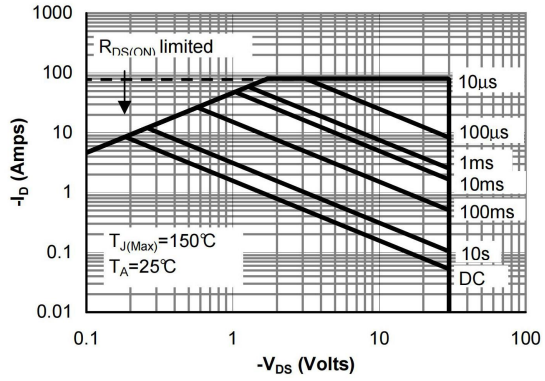


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

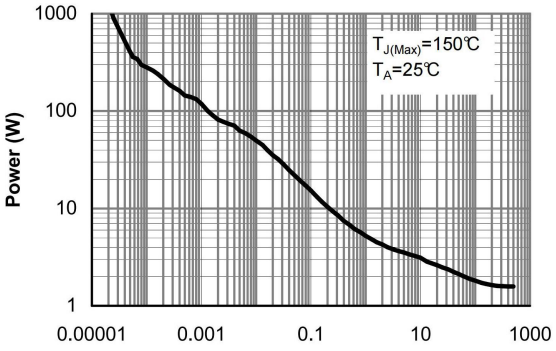


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)


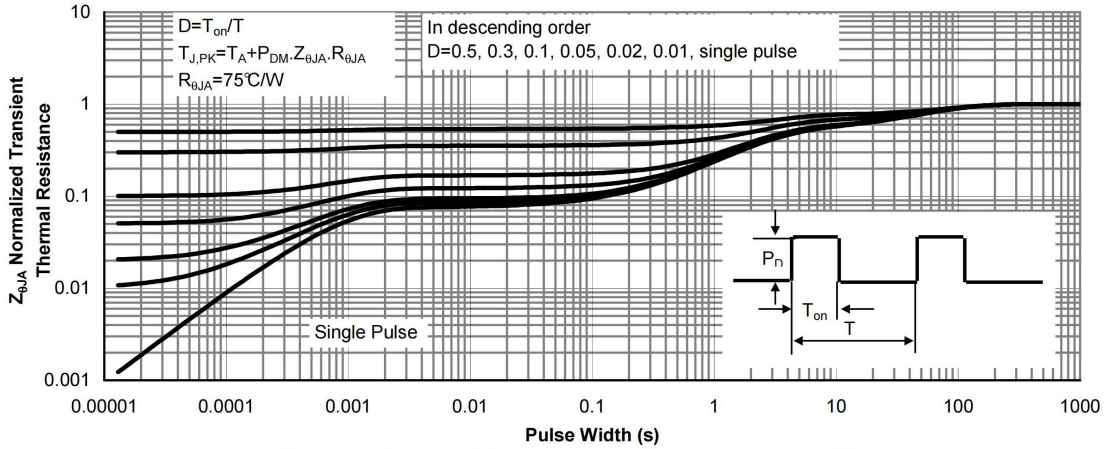



Figure 11: Normalized Maximum Transient Thermal Impedance(Note E)

OM SENI


Gate Charge Test Circuit & Waveform

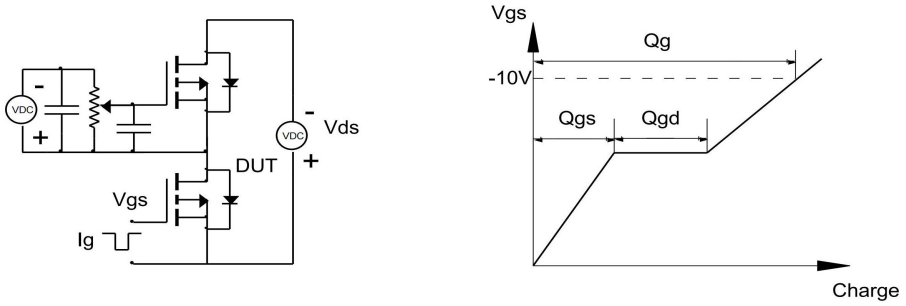

Resistive Switching Test Circuit & Waveforms

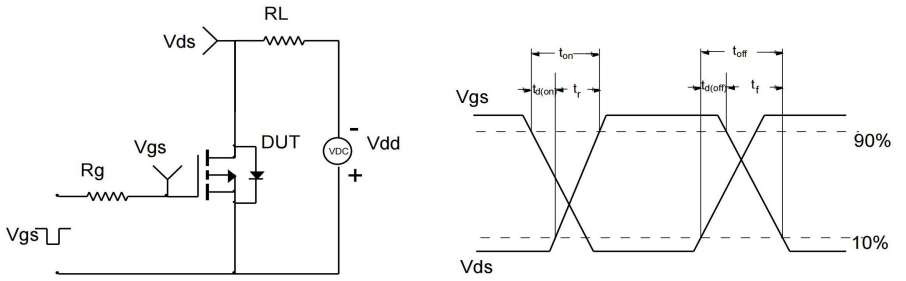

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

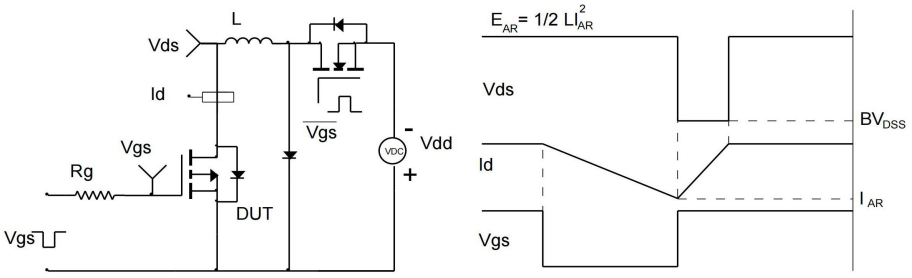

Diode Recovery Test Circuit & Waveforms

