OM SENI

AO4612

60V Complementary Enhancement

General Description


The AO4612 uses advanced trench technology MOSFETs to provide excellent $R_{DS(ON)}$ and low gate charge. The complementary MOSFETs may be used in H-bridge, Inverters and other applications.


Features

n-channel	p-channel
V_{DS} (V) = 60V	-60V
I_D = 4.5A (V_{GS}=10V)	-3.2A (V_{GS} = -10V)
$R_{DS(ON)}$	$R_{DS(ON)}$
< 56mΩ (V_{GS}=10V)	< 105mΩ (V_{GS} = -10V)
< 77mΩ (V_{GS}=4.5V)	< 135mΩ (V_{GS} = -4.5V)


100% Rg tested

SOIC-8

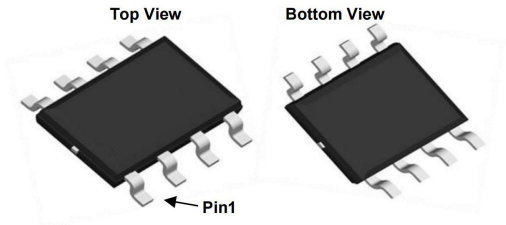




SOIC-8



n-channel



p-channel

Orderable Part Number	Package Type	Form	Minimum Order Quantity
	SO-8	Tape & Reel	3000

Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Max n-channel	Max p-channel	Units
Drain-Source Voltage		V_{DS}	60	-60	V
Gate-Source Voltage		V_{GS}	±20	±20	V
Continuous Drain Current [A]	T_A=25°C	I_D	4.5	-3.2	A
	T_A=70°C		3.6	-2.6	
Pulsed Drain Current [B]		I_{DM}	20	-20	
Power Dissipation	T_A=25°C	P_D	2	2	W
	T_A=70°C		1.28	1.28	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	-55 to 150	°C

Thermal Characteristics: n-channel and p-channel

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	48	62.5	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		74	90	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	35	40	°C/W

OM SENI

N Channel Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250μA, V_{GS}=0V	60			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=48V, V_{GS}=0V			1	μA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±20V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250μA	1	2.1	3	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	20			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=4.5A		46	56	mΩ
		T_J=125°C		79		
		V_{GS}=4.5V, I_D=3A		64	77	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=4.5A		11		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.74	1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=30V, f=1MHz		450		pF
C_{oss}	Output Capacitance			60		pF
C_{rss}	Reverse Transfer Capacitance			25		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		1.65	2	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=30V, I_D=4.5A		8.5	12	nC
Q_g(4.5V)	Total Gate Charge			4.3	7	nC
Q_{gs}	Gate Source Charge			1.6		nC
Q_{gd}	Gate Drain Charge			2.2		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=30V, R_L=6.7Ω, R_{GEN}=3Ω		4.7		ns
t_r	Turn-On Rise Time			2.3		ns
$t_{D(off)}$	Turn-Off DelayTime			15.7		ns
t_f	Turn-Off Fall Time			1.9		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=4.5A, dI/dt=100A/μs		27.5		ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=4.5A, dI/dt=100A/μs		32		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C. The value in any a given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.
B: Repetitive rating, pulse width limited by junction temperature.
C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.
D. The static characteristics in Figures 1 to 6 are obtained using 80 μs pulses, duty cycle 0.5% max.
E. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C. The SOA curve provides a single pulse rating.

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS: N-CHANNEL

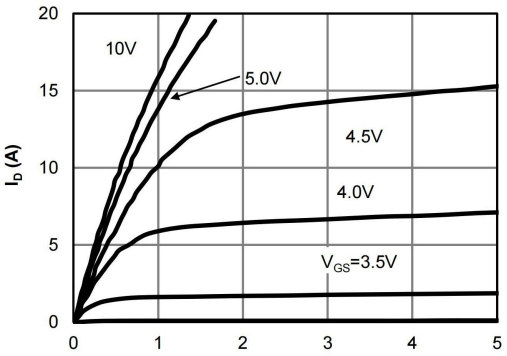


Fig 1: On-Region Characteristics

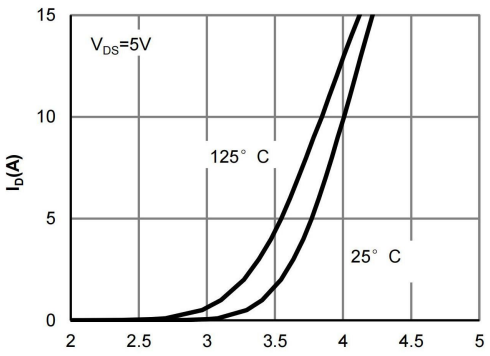


Figure 2: Transfer Characteristics

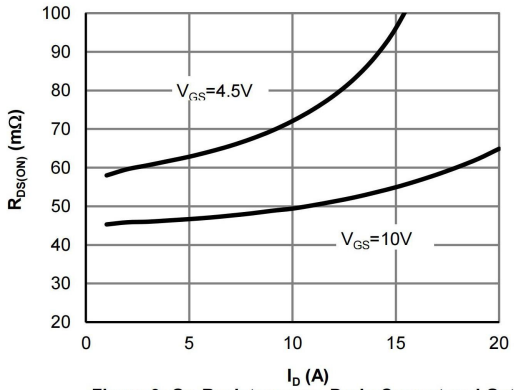


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

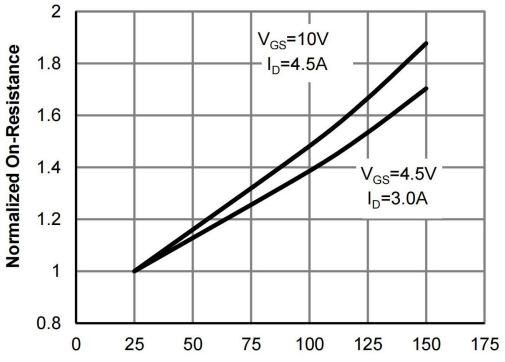


Figure 4: On-Resistance vs. Junction Temperature

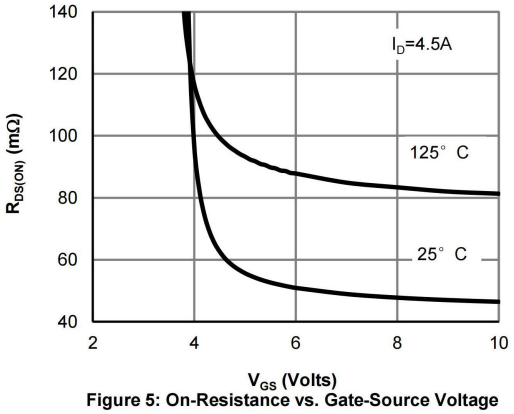


Figure 5: On-Resistance vs. Gate-Source Voltage

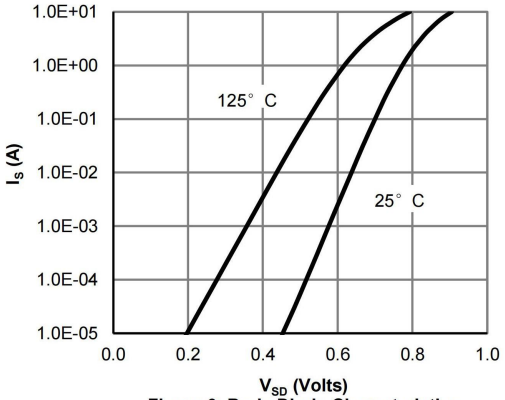


Figure 6: Body-Diode Characteristics

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS: N-CHANNEL

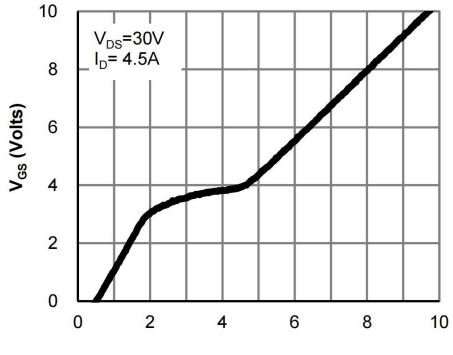


Figure 7: Gate-Charge Characteristics

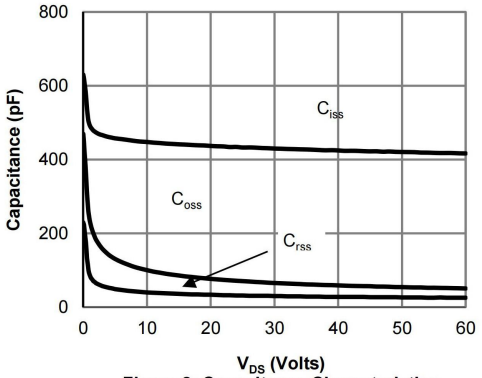


Figure 8: Capacitance Characteristics

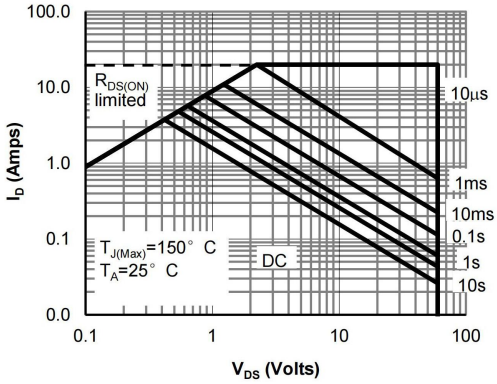


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

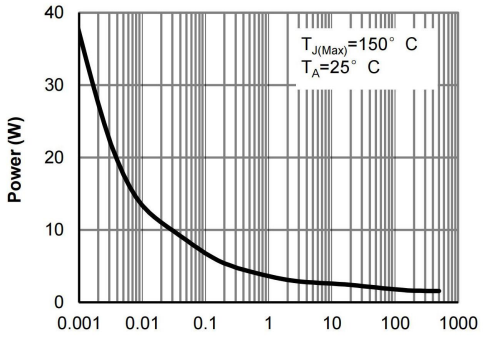


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)


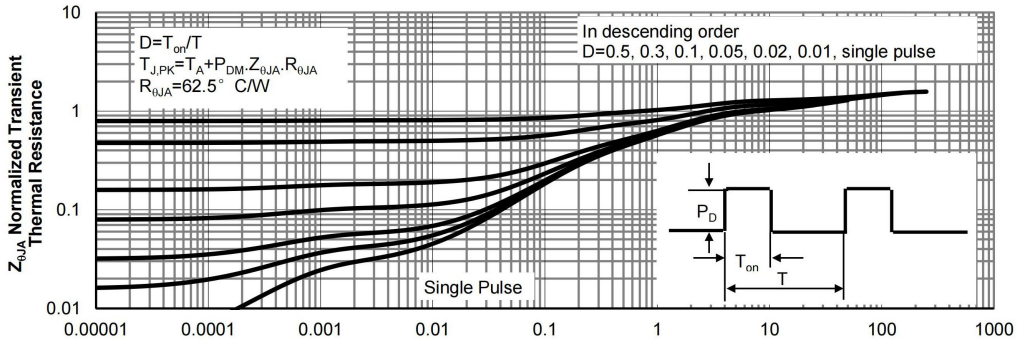



Figure 11: Normalized Maximum Transient Thermal Impedance

OM SENI


Gate Charge Test Circuit & Waveform

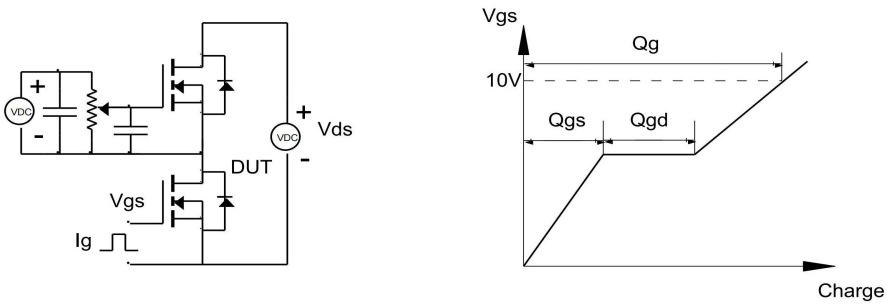


Resistive Switching Test Circuit & Waveforms

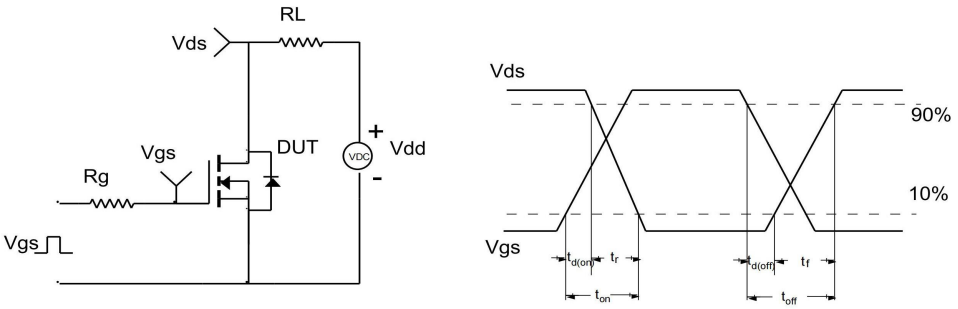

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

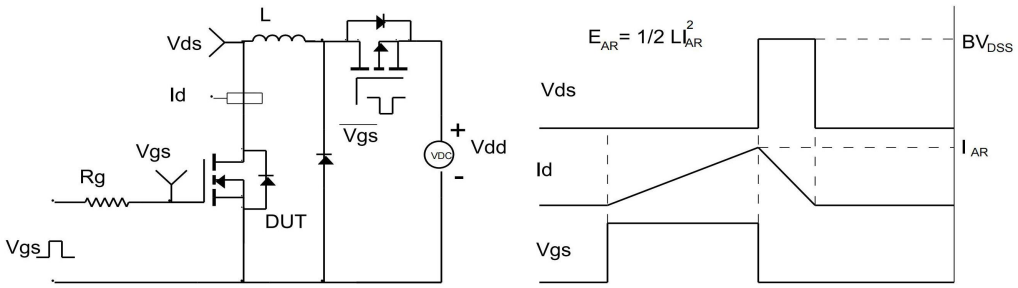

Diode Recovery Test Circuit & Waveforms

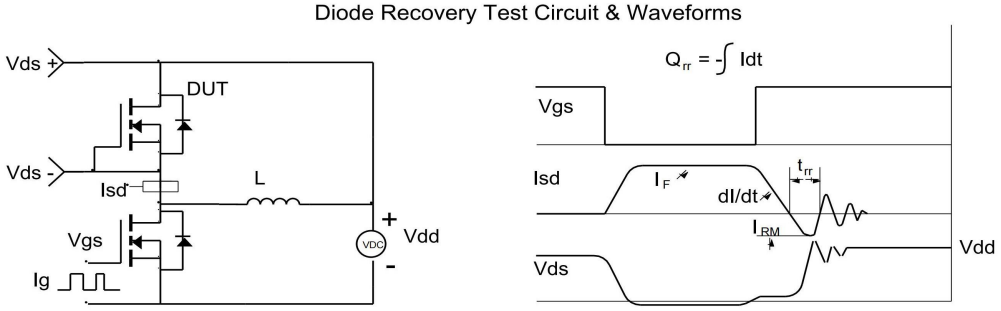

OM SENI

P-Channel Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=-250μA, V_{GS}=0V	-60			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=-48V, V_{GS}=0V			-1	μA
		T_J=55°C			-5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±20V			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=-250μA	-1	-2.1	-3	V
$I_{D(ON)}$	On state drain current	V_{GS}=-10V, V_{DS}=-5V	-20			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=-10V, I_D=-3.2A		84	105	mΩ
		T_J=125°C		145		
		V_{GS}=-4.5V, I_D=-2.8A		106	135	mΩ
g_{FS}	Forward Transconductance	V_{DS}=-5V, I_D=-3.2A		9		S
V_{SD}	Diode Forward Voltage	I_S=-1A,V_{GS}=0V		-0.73	-1	V
I_S	Maximum Body-Diode Continuous Current				-3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=-30V, f=1MHz		930		pF
C_{oss}	Output Capacitance			85		pF
C_{rss}	Reverse Transfer Capacitance			35		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		9.5	15	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge (10V)	V_{GS}=-10V, V_{DS}=-30V, I_D=-3.2A		16	22	nC
Q_g(4.5V)	Total Gate Charge (4.5V)			8	12	nC
Q_{gs}	Gate Source Charge			2.5		nC
Q_{gd}	Gate Drain Charge			3.2		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=-10V, V_{DS}=-30V, R_L=9.4Ω, R_{GEN}=3Ω		8		ns
t_r	Turn-On Rise Time			3.8		ns
$t_{D(off)}$	Turn-Off DelayTime			31.5		ns
t_f	Turn-Off Fall Time			7.5		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=-3.2A, dI/dt=100A/μs		27		ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=-3.2A, dI/dt=100A/μs		32		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C. The value in any a given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.
B: Repetitive rating, pulse width limited by junction temperature.
C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.
D. The static characteristics in Figures 1 to 6,12,14 are obtained using 80 μs pulses, duty cycle 0.5% max.
E. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C. The SOA curve provides a single pulse rating.

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS: P-CHANNEL

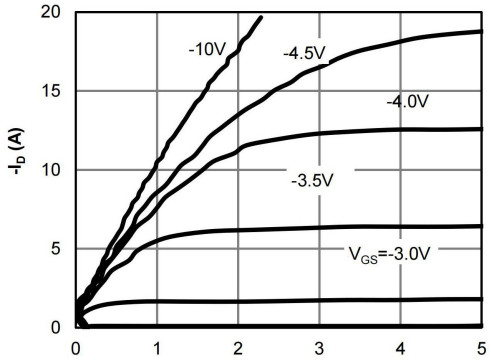


Fig 1: On-Region Characteristics

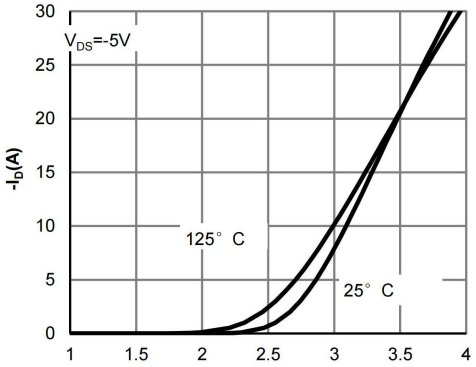


Figure 2: Transfer Characteristics

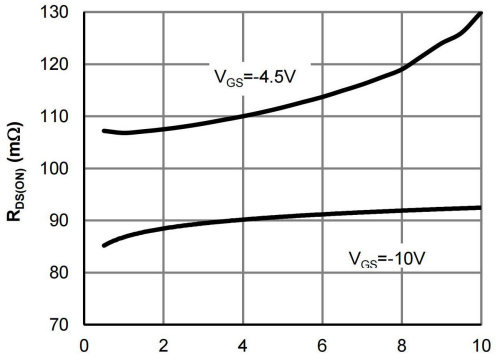


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

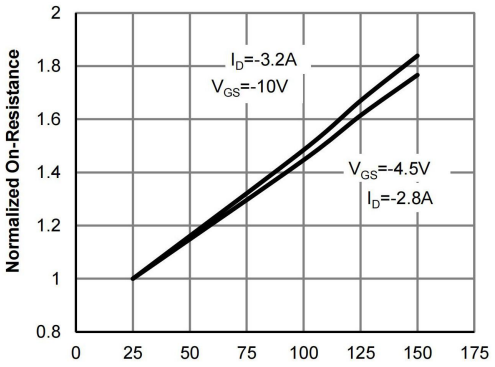


Figure 4: On-Resistance vs. Junction Temperature

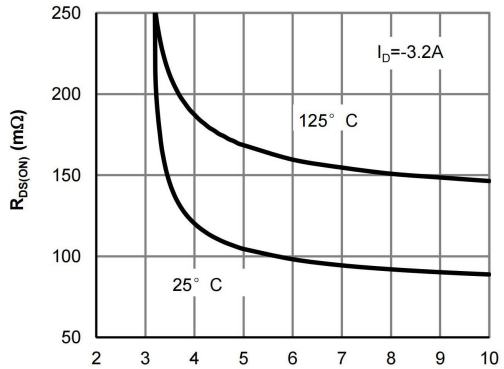


Figure 5: On-Resistance vs. Gate-Source Voltage

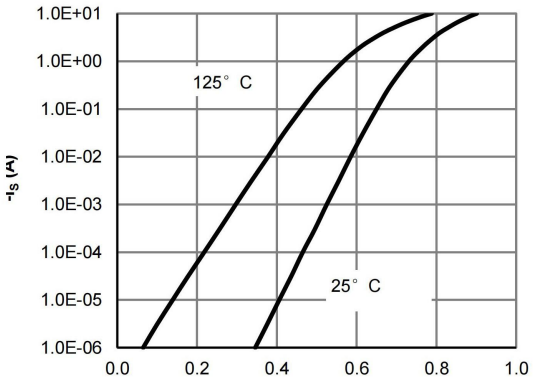


Figure 6: Body-Diode Characteristics

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS: P-CHANNEL

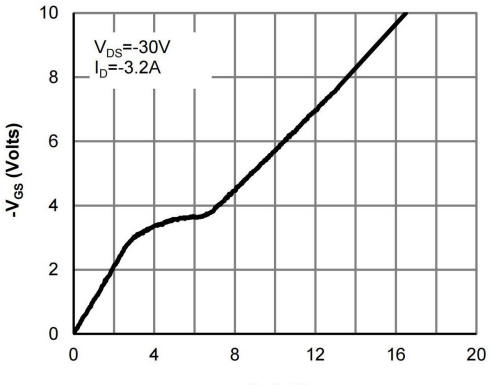


Figure 7: Gate-Charge Characteristics

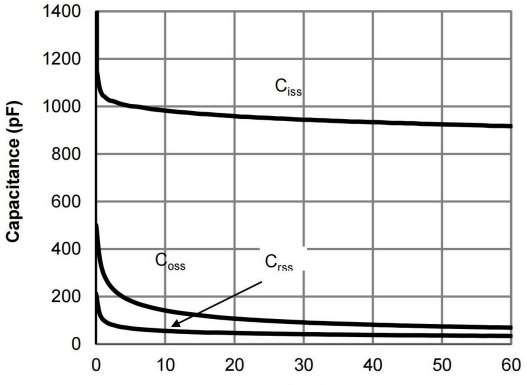


Figure 8: Capacitance Characteristics

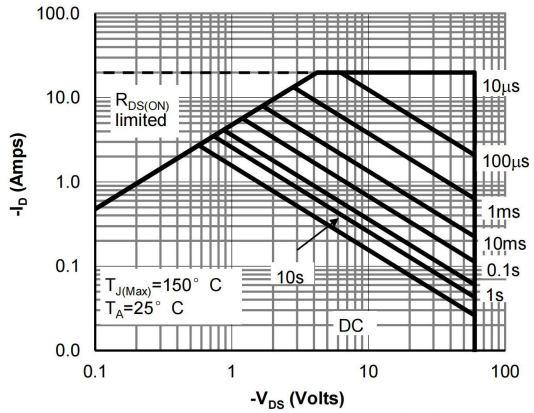


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

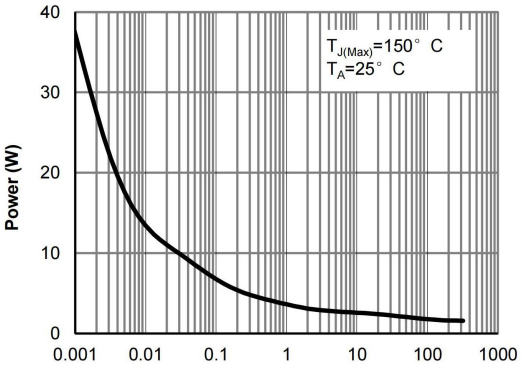


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)



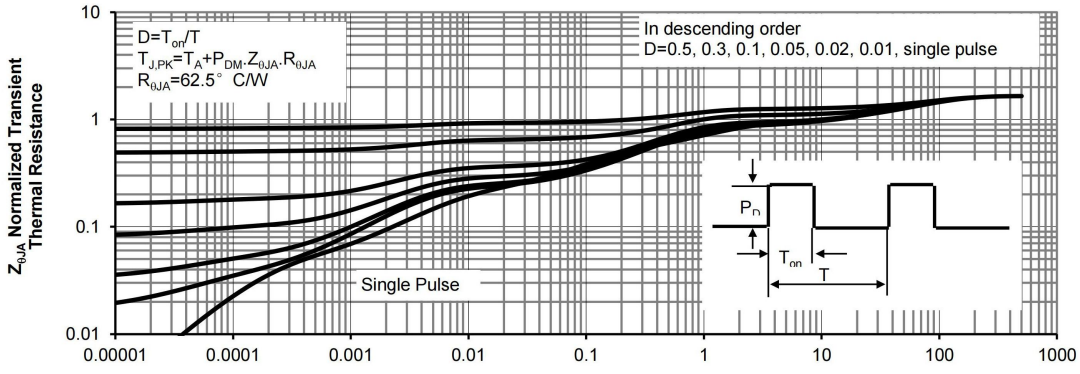


Figure 11: Normalized Maximum Transient Thermal Impedance


OM SENI


Gate Charge Test Circuit & Waveform

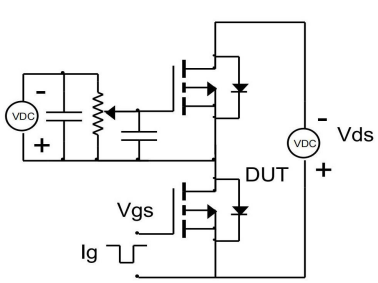

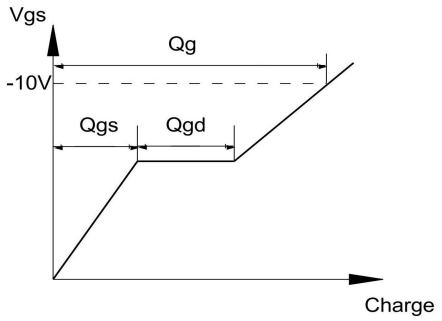



Resistive Switching Test Circuit & Waveforms

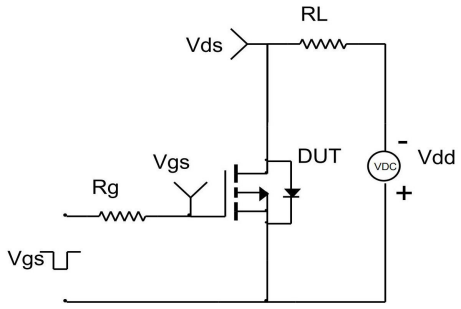

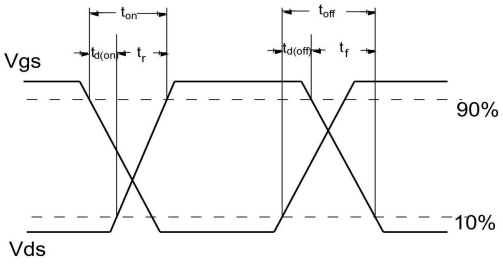

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

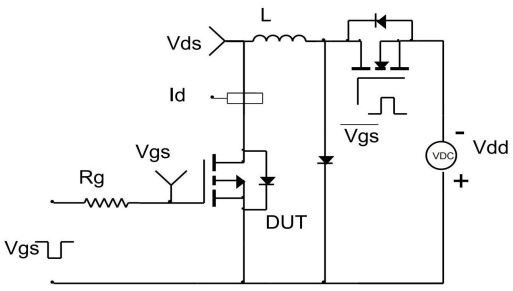

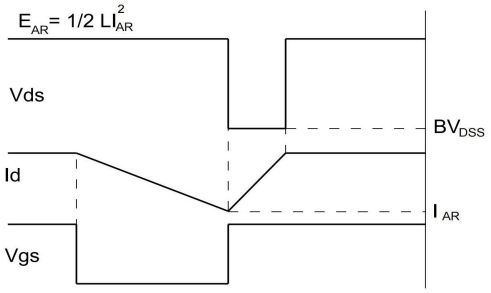

Diode Recovery Test Circuit & Waveforms

