OM SENI

AOD5B65M1

650V, 5A Alpha IGBT™

With soft and fast recovery anti-parallel diode

General Description


- Latest AlphaIGBT (α IGBT) technology
- 650V breakdown voltage
- Very fast and soft recovery freewheeling diode
- High efficient turn-on di/dt controllability
- Low VCE(SAT) enables high efficiencies
- Low turn-off switching loss and softness
- Very good EMI behavior
- High short-circuit ruggedness

Applications


- Motor Drives
- Home appliance applications such as refrigerators and washing machines
- Fan, Pumps, Vacuum Cleaner
- Other Hard Switching Applications

Product Summary

V_{CE}	650V
I_C (T_C=100°C)	5A
$V_{CE(sat)}$ (T_J=25°C)	1.57V



AOD5B65M1



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOD5B65M1	TO252	Tape & Reel	2500

Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	AOD5B65M1	Units
Collector-Emitter Voltage		V_{CE}	650	V
Gate-Emitter Voltage		V_{GE}	±30	V
Continuous Collector Current	T_C=25°C	I_C	10	A
	T_C=100°C		5	
Pulsed Collector Current, Limited by T_{Jmax}		I_{CM}	15	A
Turn off SOA, V_{CE} ⩽ 650V, Limited by T_{Jmax}		I_{LM}	15	A
Continuous Diode Forward Current	T_C=25°C	I_F	10	A
	T_C=100°C		5	
Diode Pulsed Current, Limited by T_{Jmax}		I_{FM}	15	A
Short circuit withstanding time 1) V_{GE} = 15V, V_{CC} ⩽ 400V, T_J ⩽ 150°C		t_{SC}	5	μs
Power Dissipation	T_C=25°C	P_D	69	W
	T_C=100°C		28	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds		T_L	300	°C

Thermal Characteristics Parameter	Symbol	AOD5B65M1	Units
Maximum Junction-to-Ambient	$R_{\theta JA}$	55	°C/W
Maximum IGBT Junction-to-Case	$R_{\theta JC}$	1.8	°C/W
Maximum Diode Junction-to-Case	$R_{\theta JC}$	5.5	°C/W

1) Allowed number of short circuits: <1000; time between short circuits: >1s.

OM SENI

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ	Max	Units
STATIC PARAMETERS							
BV_{CES}	Collector-Emitter Breakdown Voltage	I_C=1mA, V_{GE}=0V, T_J=25°C		650	-	-	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	V_{GE}=15V, I_C=5A	T_J=25°C	-	1.57	1.98	V
			T_J=125°C	-	1.87	-	
			T_J=150°C	-	1.95	-	
V_F	Diode Forward Voltage	V_{GE}=0V, I_C=5A	T_J=25°C	-	1.8	2.25	V
			T_J=125°C	-	1.79	-	
			T_J=150°C	-	1.75	-	
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	V_{CE}=5V, I_C=1mA		-	5.1	-	V
I_{CES}	Zero Gate Voltage Collector Current	V_{CE}=650V, V_{GE}=0V	T_J=25°C	-	-	10	μA
			T_J=125°C	-	-	100	
			T_J=150°C	-	-	500	
I_{GES}	Gate-Emitter leakage current	V_{CE}=0V, V_{GE}=±30V		-	-	±100	nA
g_{FS}	Forward Transconductance	V_{CE}=20V, I_C=5A		-	4.1	-	S
DYNAMIC PARAMETERS							
C_{ies}	Input Capacitance	V_{GE}=0V, V_{CC}=25V, f=1MHz		-	348	-	pF
C_{oes}	Output Capacitance			-	36	-	pF
C_{res}	Reverse Transfer Capacitance			-	13	-	pF
Q_g	Total Gate Charge	V_{GE}=15V, V_{CC}=520V, I_C=5A		-	14	-	nC
Q_{ge}	Gate to Emitter Charge			-	3	-	nC
Q_{gc}	Gate to Collector Charge			-	6.5	-	nC
$I_{C(SC)}$	Short circuit collector current	V_{GE}=15V, V_{CC}=400V, t_{sc}≤5us, T_J≤150°C		-	30	-	A
R_g	Gate resistance	V_{GE}=0V, V_{CC}=0V, f=1MHz		-	6	-	Ω
SWITCHING PARAMETERS, (Load Inductive, T_J=25°C)							
$t_{D(on)}$	Turn-On DelayTime	T_J=25°C, V_{GE}=15V, V_{CC}=400V, I_C=5A, R_G=60Ω		-	8.5	-	ns
t_r	Turn-On Rise Time			-	13	-	ns
$t_{D(off)}$	Turn-Off Delay Time			-	106	-	ns
t_f	Turn-Off Fall Time			-	18	-	ns
E_{on}	Turn-On Energy			-	0.08	-	mJ
E_{off}	Turn-Off Energy			-	0.07	-	mJ
E_{total}	Total Switching Energy			-	0.15	-	mJ
t_{rr}	Diode Reverse Recovery Time	T_J=25°C, I_F=5A, dI/dt=200A/μs, V_{CC}=400V		-	195	-	ns
Q_{rr}	Diode Reverse Recovery Charge			-	0.24	-	μC
I_{rm}	Diode Peak Reverse Recovery Current			-	2.78	-	A
SWITCHING PARAMETERS, (Load Inductive, T_J=150°C)							
$t_{D(on)}$	Turn-On DelayTime	T_J=150°C, V_{GE}=15V, V_{CC}=400V, I_C=5A, R_G=60Ω		-	7	-	ns
t_r	Turn-On Rise Time			-	14	-	ns
$t_{D(off)}$	Turn-Off Delay Time			-	127	-	ns
t_f	Turn-Off Fall Time			-	30	-	ns
E_{on}	Turn-On Energy			-	0.09	-	mJ
E_{off}	Turn-Off Energy			-	0.12	-	mJ
E_{total}	Total Switching Energy			-	0.21	-	mJ
t_{rr}	Diode Reverse Recovery Time	T_J=150°C, I_F=5A, dI/dt=200A/μs, V_{CC}=400V		-	273	-	ns
Q_{rr}	Diode Reverse Recovery Charge			-	0.38	-	μC
I_{rm}	Diode Peak Reverse Recovery Current			-	3.3	-	A

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

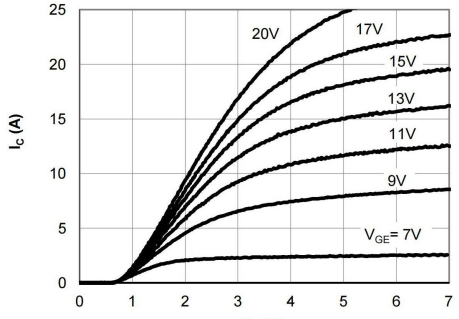


Figure 1: Output Characteristic (T_j=25°C)

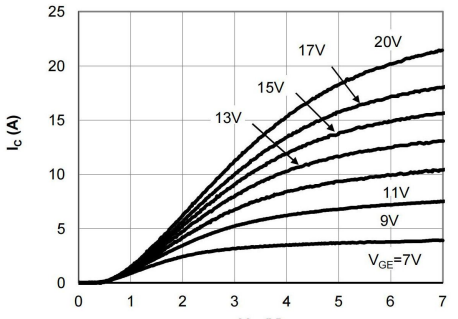


Figure 2: Output Characteristic (T_j=150°C)

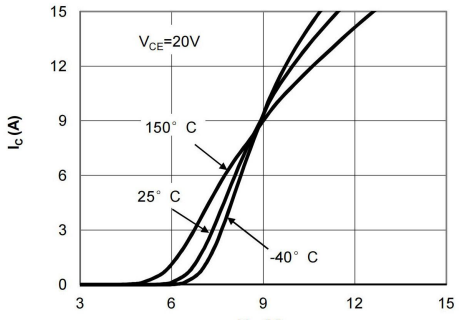


Figure 3: Transfer Characteristic

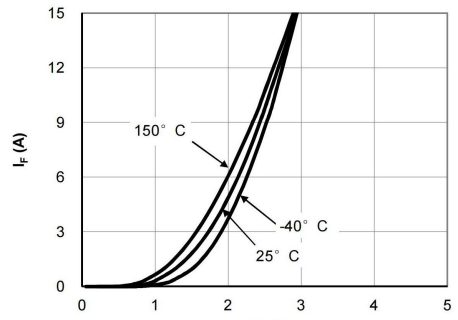


Figure 4: Diode Characteristic

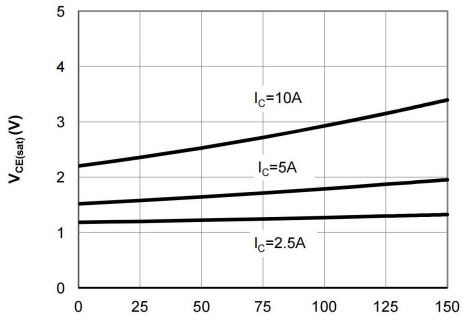


Figure 5: Collector-Emitter Saturation Voltage vs. Junction Temperature

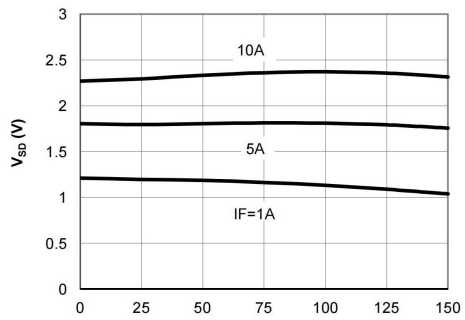


Figure 6: Diode Forward voltage vs. Junction Temperature

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

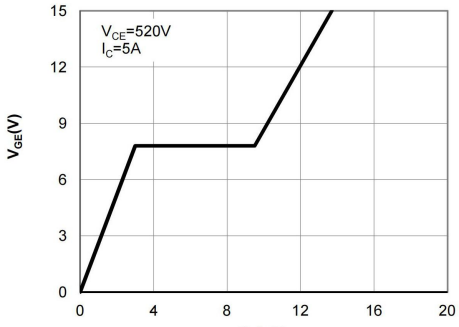


Figure 7: Gate-Charge Characteristics

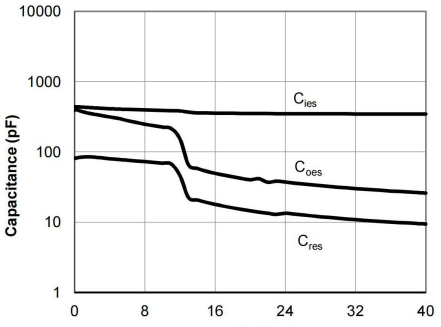


Figure 8: Capacitance Characteristic

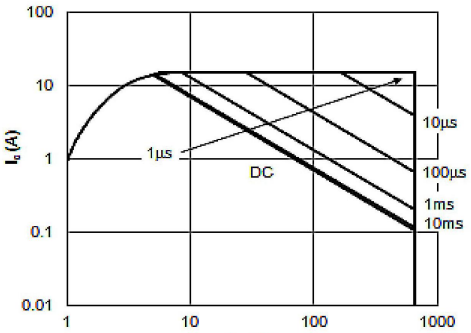


Figure 9: Forward Bias Safe Operating Area (T_C=25°C,V_{GE}=15V)

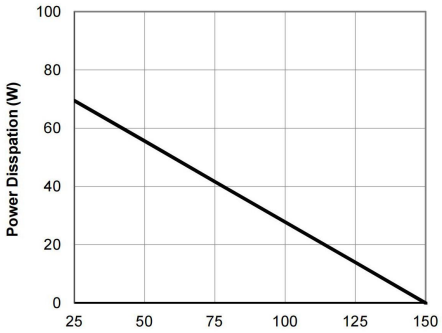


Figure 10: Power Disspation as a Function of Case

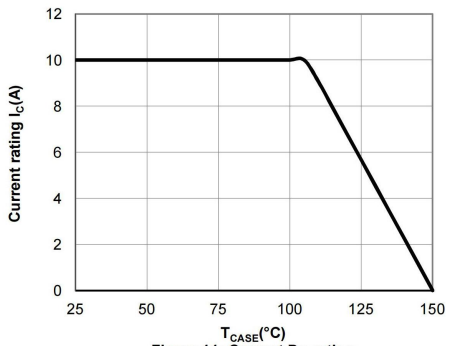


Figure 11: Current De-rating

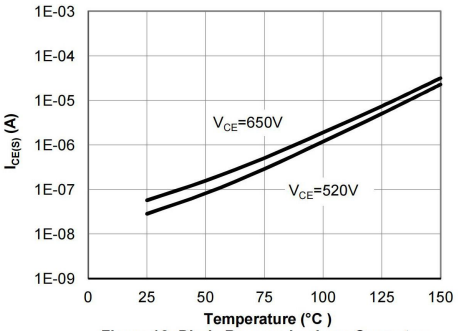


Figure 12: Diode Reverse Leakage Current vs. Junction Temperature

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

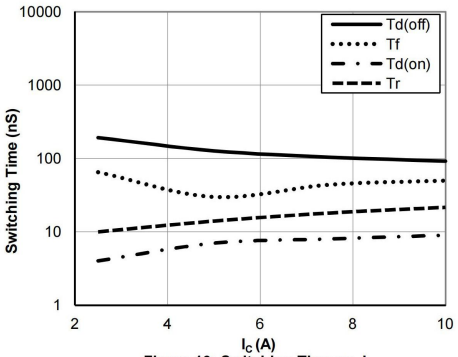


Figure 13: Switching Time vs. I_C
(T_j=150°C,V_{GE}=15V,V_{CE}=400V,R_g=60Ω)

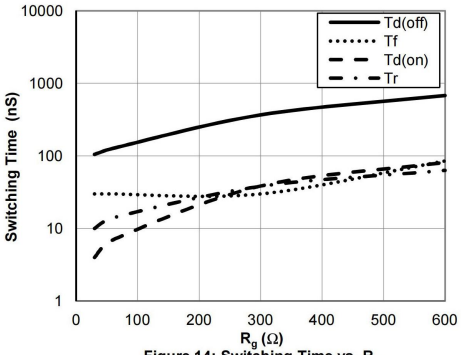


Figure 14: Switching Time vs. R_g
(T_j=150°C,V_{GE}=15V,V_{CE}=400V,I_C=5A)

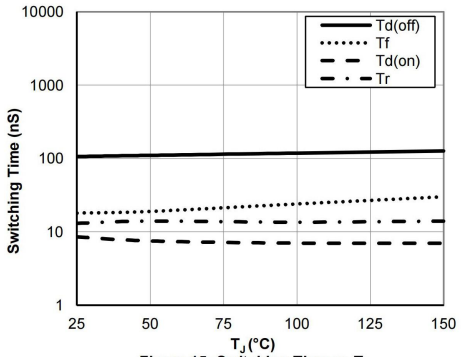


Figure 15: Switching Time vs.T_j
(V_{GE}=15V,V_{CE}=400V,I_C=5A,R_g=60Ω)

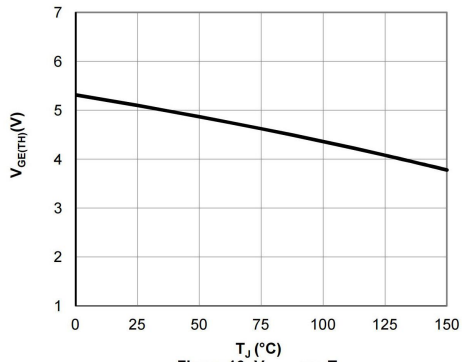


Figure 16: $V_{GE(TH)}$ vs. T_j

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

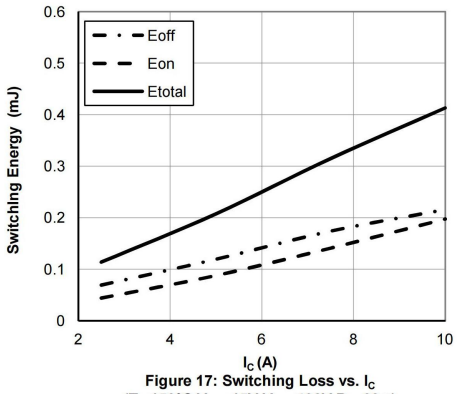


Figure 17: Switching Loss vs. I_C
(T_j=150°C,V_{GE}=15V,V_{CE}=400V,R_g=60Ω)

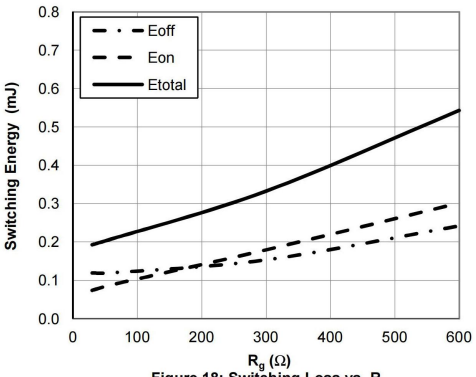


Figure 18: Switching Loss vs. R_g
(T_j=150°C,V_{GE}=15V,V_{CE}=400V,I_C=5A)

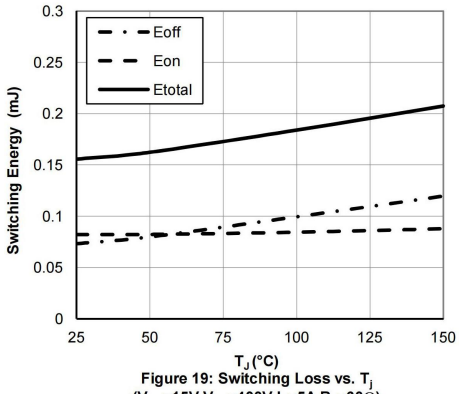


Figure 19: Switching Loss vs. T_j
(V_{GE}=15V,V_{CE}=400V,I_C=5A,R_g=60Ω)

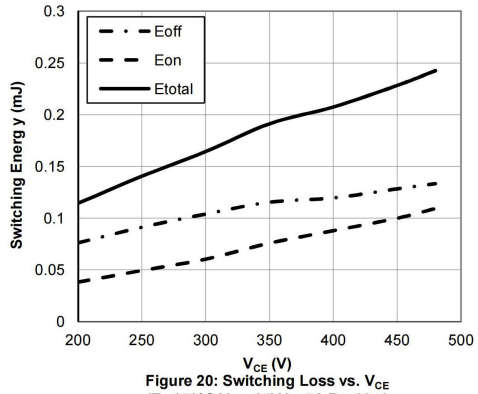


Figure 20: Switching Loss vs. V_{CE}
(T_j=150°C,V_{GE}=15V,I_C=5A,R_g=60Ω)

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

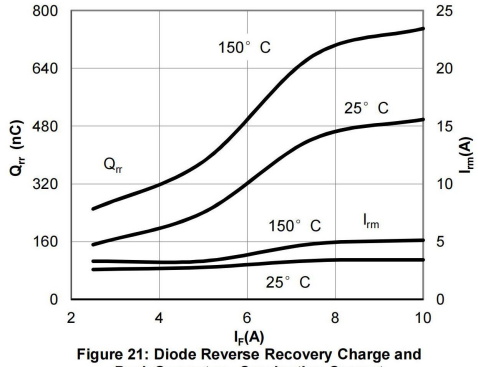


Figure 21: Diode Reverse Recovery Charge and Peak Current vs. Conduction Current (V_{GE}=15V,V_{CE}=400V,di/dt=200A/μs)

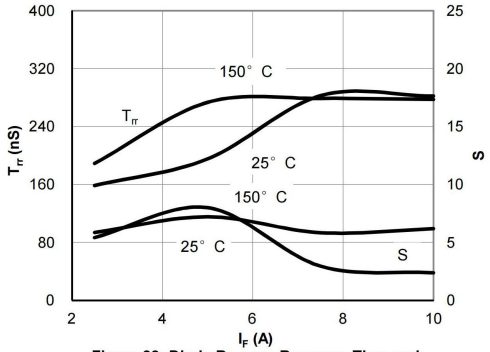


Figure 22: Diode Reverse Recovery Time and Softness Factor vs. Conduction Current (V_{GE}=15V,V_{CE}=400V,di/dt=200A/μs)

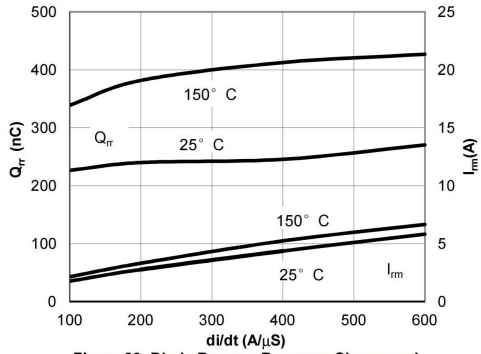


Figure 23: Diode Reverse Recovery Charge and Peak Current vs. di/dt (V_{GE}=15V,V_{CE}=400V,I_F=5A)

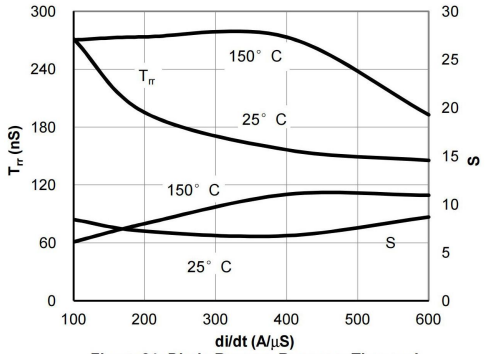


Figure 24: Diode Reverse Recovery Time and Softness Factor vs. di/dt (V_{GE}=15V,V_{CE}=400V,I_F=5A)

OM SENI

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

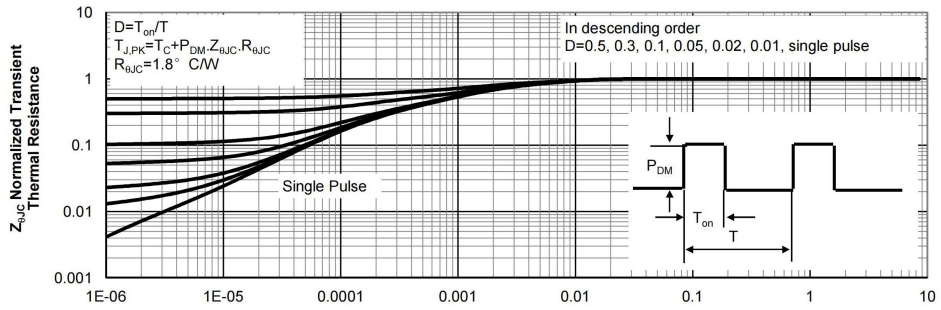


Figure 25: Normalized Maximum Transient Thermal Impedance for IGBT

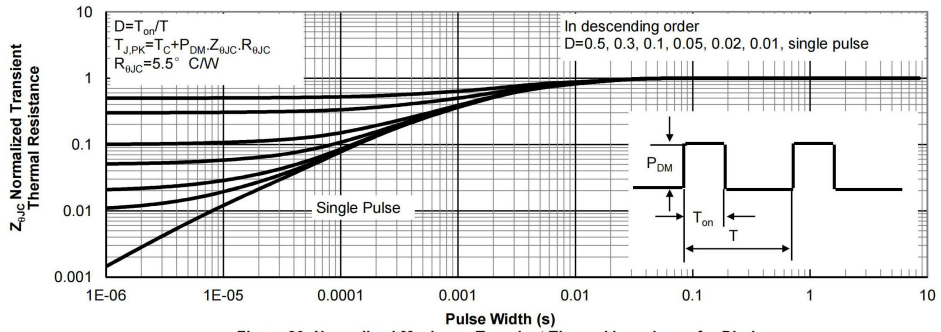


Figure 26: Normalized Maximum Transient Thermal Impedance for Diode

OM SENI

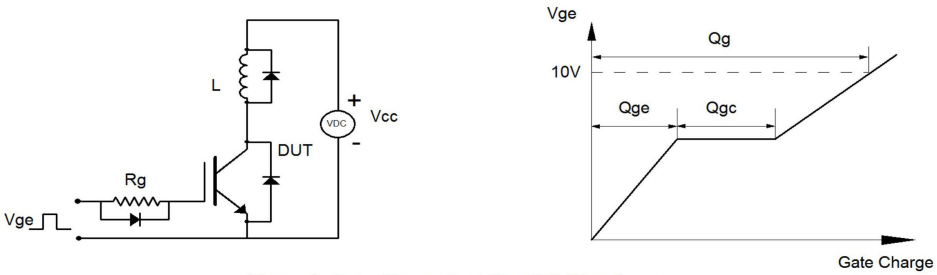


Figure A: Gate Charge Test Circuit & Waveforms

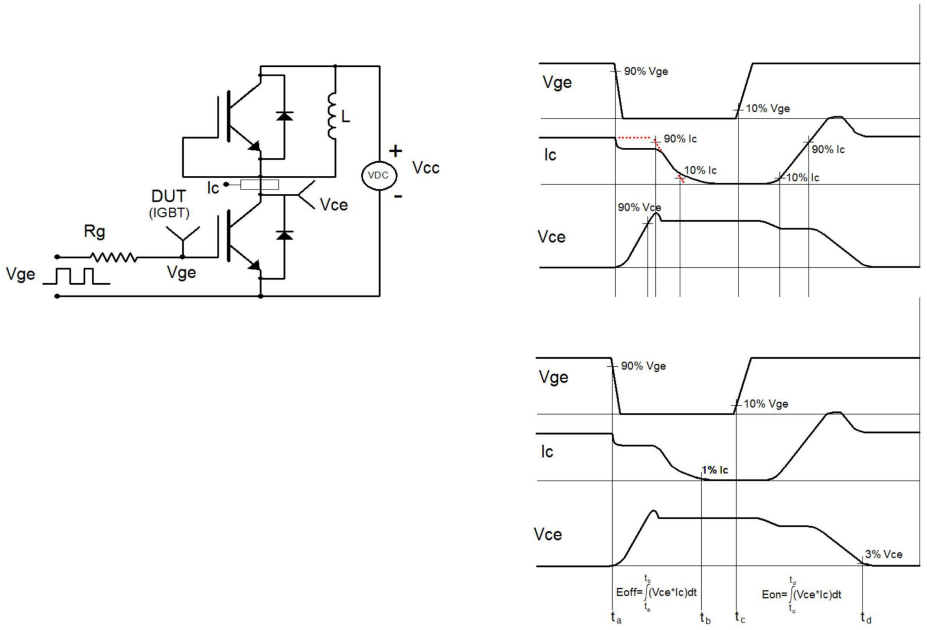


Figure B: Inductive Switching Test Circuit & Waveforms

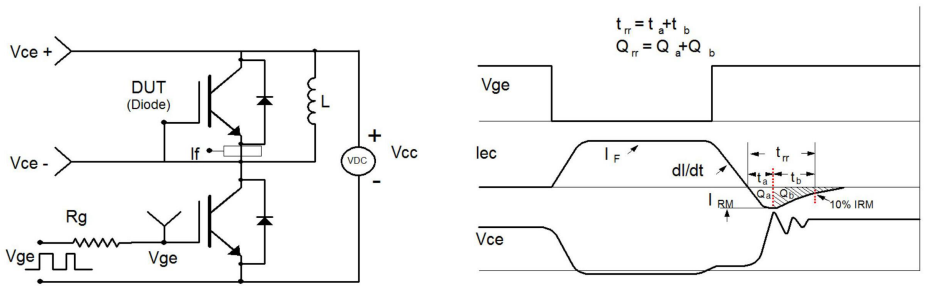


Figure C: Diode Recovery Test Circuit & Waveforms