OM SENI

BAS16HT1G
Small Signal Diode



SOD-323



Absolute Maximum Ratings * T_A = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{RRM}	Maximum Repetitive Reverse Voltage	85	V
$I_{F(AV)}$	Average Rectified Forward Current	200	mA
I_{FSM}	Non-repetitive Peak Forward Surge Current Pulse Width = 1.0 second	600	mA
T_{STG}	Storage Temperature Range	-65 to +150	°C
T_J	Operating Junction Temperature	-55 to +150	°C

* These ratings are limiting values above which the serviceability of the diode may be impaired.

NOTES:

1) These ratings are based on a maximum junction temperature of 150 degrees C.

2) These are steady limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics

Symbol	Parameter	Value	Units
P_D	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	600	°C/W

Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Max.	Units
V_R	Breakdown Voltage	I_R = 5.0μA	85		V
V_F	Forward Voltage	I_F = 0.1mA I_F = 10mA I_F = 50mA I_F = 150mA		715 855 1.0 1.25	mV mV V V
I_R	Reverse Leakage	V_R = 75V V_R = 25V, T_A = 150°C V_R = 75V, T_A = 150°C		1.0 30 50	μA μA μA
C_T	Total Capacitance	V_R = 0, f = 1.0MHz		2.0	pF
t_{rr}	Reverse Recovery Time	I_F = I_R = 10mA, I_{RR} = 1.0mA, R_L = 100Ω		6.0	ns

OM SENI

Typical Performance Characteristics

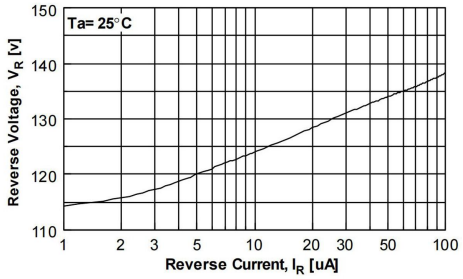


Figure 1. Reverse Voltage vs Reverse Current
BV - 1.0 to 100μA

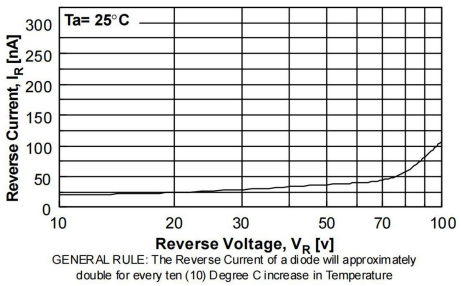


Figure 2. Reverse Current vs Reverse Voltage
IR - 10 to 100V

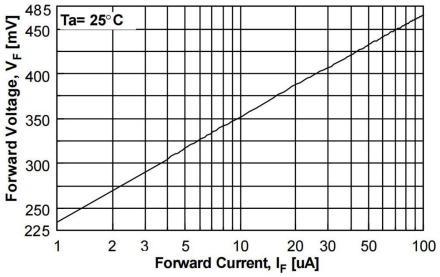


Figure 3. Forward Voltage vs Forward Current
VF - 1.0 to 100μA

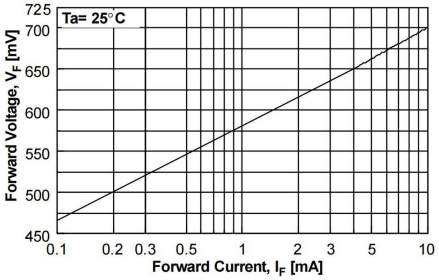


Figure 4. Forward Voltage vs Forward Current
VF - 0.1 to 10mA

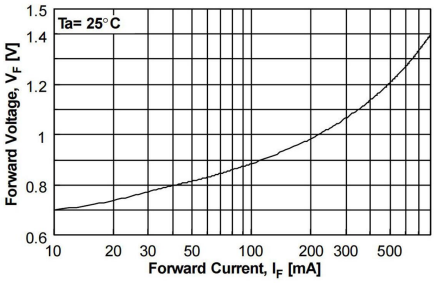


Figure 5. Forward Voltage vs Forward Current
VF - 10 - 800mA

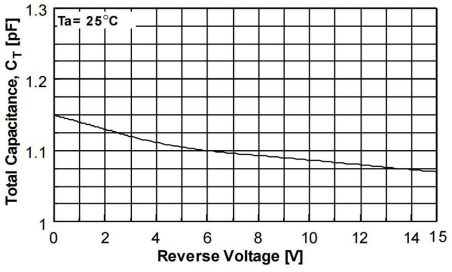


Figure 6. Total Capacitance

OM SENI

Typical Performance Characteristics (Continued)

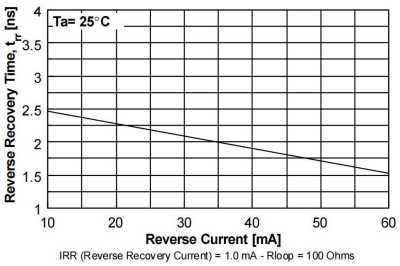


Figure 1. Reverse Recovery Time vs Reverse Current TRR - IR 10mA vs 60mA

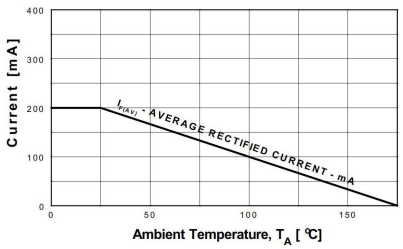


Figure 2. Average Rectified Current ($I_{F(AV)}$) vs Ambient Temperature (T_A)

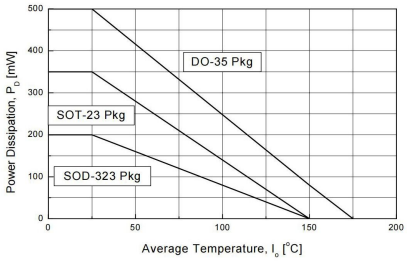



Figure 3. Power Derating Curve

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-323	R1	0.0048	3000	30000	240000	7''

Package Outline Dimensions (SOD-323)

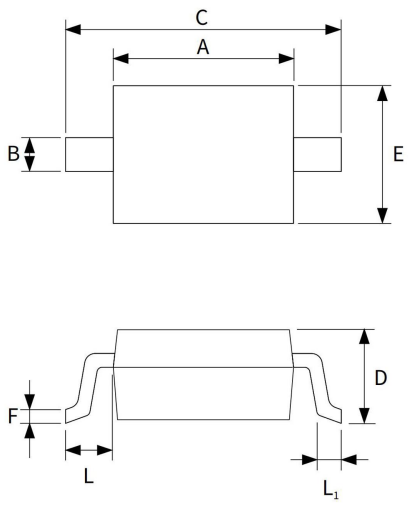

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	0.25	0.40	0.010	0.016
C	2.30	2.80	0.091	0.110
D	0.80	1.10	0.031	0.043
D_1	0.80	0.90	0.031	0.035
E	1.20	1.40	0.047	0.055
F	0.08	0.18	0.003	0.007
L	0.475REF		0.019REF	
L_1	0.25	0.40	0.010	0.016
H	-	0.14	-	0.006

Suggested Pad Layout

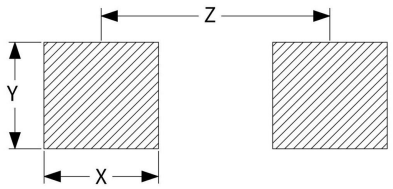

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
X	0.65	0.75	0.026	0.030
Y	0.65	0.75	0.026	0.030
Z	2.10	2.20	0.084	0.088