
www.omseni.com


OM SENI

BAV74LT1G
Monolithic Dual Switching Diode

Features

- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant





SOT−23 (TO−236)


MAXIMUM RATINGS (EACH DIODE)

Rating	Symbol	Value	Unit
Reverse Voltage	V_R	50	Vdc
Forward Current	I_F	200	mAdc
Peak Forward Surge Current	$I_{FM(surge)}$	500	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR−5 Board (Note 1), T_A = 25°C Derate above 25°C	P_D	225 1.8	mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	556	°C/W
Total Device Dissipation Alumina Substrate, (Note 2) T_A = 25°C Derate above 25°C	P_D	300 2.4	mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	417	°C/W
Junction and Storage Temperature	T_J, T_{stg}	−55 to +150	°C

MARKING DIAGRAM



JA = Device Code
M = Date Code*
▪ = Pb−Free Package
(Note: Microdot may be in either location)
*Date Code orientation and/or overbar may vary depending upon manufacturing location.

OM SENI

BAV74LT1G

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) **(EACH DIODE)**

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Reverse Breakdown Voltage ($I_{(BR)}$ = 5.0 μAdc)	$V_{(BR)}$	50	–	Vdc
Reverse Voltage Leakage Current, (Note 3) (V_R = 50 Vdc, T_J = 125°C) (V_R = 50 Vdc)	I_R	– –	100 0.1	μAdc
Diode Capacitance (V_R = 0, f = 1.0 MHz)	C_D	–	2.0	pF
Forward Voltage (I_F = 100 mAdc)	V_F	–	1.0	Vdc
Reverse Recovery Time (I_F = I_R = 10 mAdc, $I_{R(REC)}$ = 1.0 mAdc, measured at I_R = 1.0 mA, R_L = 100 Ω)	t_{rr}	–	4.0	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. For each individual diode while the second diode is unbiased.

CURVES APPLICABLE TO EACH ANODE

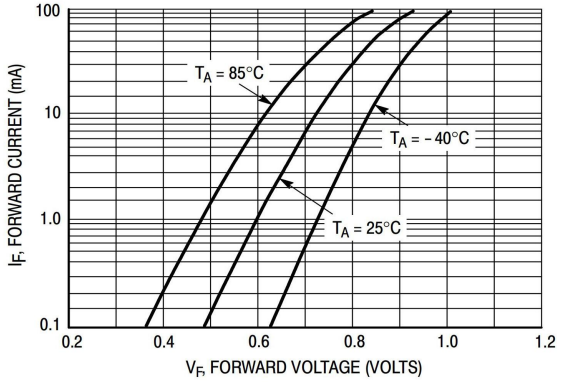


Figure 1. Forward Voltage

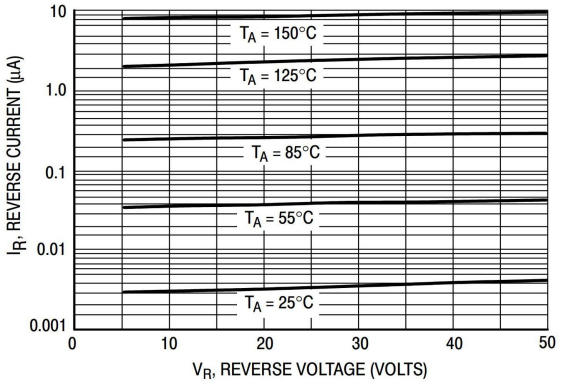


Figure 2. Leakage Current

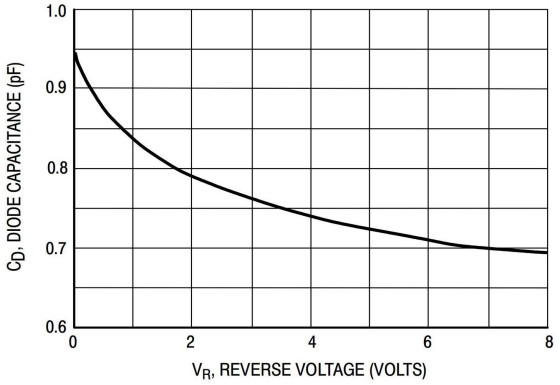



Figure 3. Capacitance

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	30000	240000	7''

Package Outline Dimensions (SOT-23)

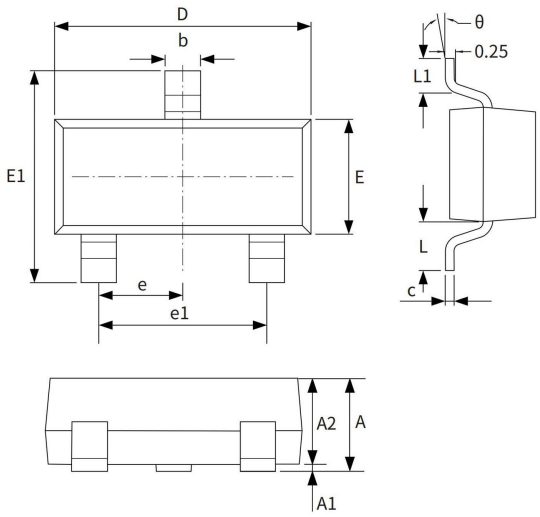

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

Suggested Pad Layout

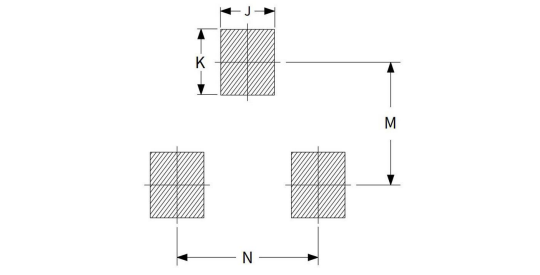

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.75	0.85	0.030	0.033
K	0.85	0.95	0.033	0.037
M	1.95	2.05	0.077	0.081
N	1.85	1.95	0.073	0.077