OM SENI

FDN304PZ

P-Channel 1.8V Specified PowerTrench® MOSFET

General Description

This P-Channel 1.8V specified MOSFET uses Fairchild's advanced low voltage PowerTrench process. It has been optimized for battery power management applications.

Applications

- Battery management
- Load switch
- Battery protection


Features

- –2.4 A, –20 V. $R_{DS(ON)}$ = 52 mΩ @ V_{GS} = –4.5 V
  $R_{DS(ON)}$ = 70 mΩ @ V_{GS} = –2.5 V
  $R_{DS(ON)}$ = 100 mΩ @ V_{GS} = –1.8 V
- Fast switching speed
- ESD protection diode
- High performance trench technology for extremely low $R_{DS(ON)}$
- SuperSOT™ -3 provides low $R_{DS(ON)}$ and 30% higher power handling capability than SOT23 in the same footprint



SOT–23

1 – Gate
2 – Source
3 – Drain



Absolute Maximum Ratings

T_A=25°C unless otherwise noted

Symbol	Parameter		Ratings	Units
V_{DSS}	Drain-Source Voltage		–20	V
V_{GSS}	Gate-Source Voltage		±8	V
I_D	Drain Current – Continuous	(Note 1a)	–2.4	A
	– Pulsed		–10	
P_D	Maximum Power Dissipation	(Note 1a)	0.5	W
		(Note 1b)	0.46	
T_J, T_{STG}	Operating and Storage Junction Temperature Range		–55 to +150	°C

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	250	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	75	°C/W

OM SENI

Electrical Characteristics

T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
BV_{DSS}	Drain–Source Breakdown Voltage	V_{GS} = 0 V, I_D = –250 μA	–20			V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = –250 μA,Referenced to 25°C		–13		mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = –16 V, V_{GS} = 0 V			–1	μA
I_{GSS}	Gate–Body Leakage	V_{GS} = ±8 V, V_{DS} = 0 V			±10	uA
On Characteristics (Note 2)						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = –250 μA	–0.4	–0.8	–1.5	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	I_D = –250 μA,Referenced to 25°C		3		mV/°C
$R_{DS(on)}$	Static Drain–Source On–Resistance	V_{GS} = –4.5 V, I_D = –2.4 A V_{GS} = –2.5 V, I_D = –2.0 A V_{GS} = –1.8V, I_D = –1.8 A		36 47 65	52 70 100	mΩ
$I_{D(on)}$	On–State Drain Current	V_{GS} = –4.5 V, V_{DS} = –5 V	–10			A
g_{FS}	Forward Transconductance	V_{DS} = –5 V, I_D = –1.25 A		12		S
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS} = –10 V, V_{GS} = 0 V, f = 1.0 MHz		1310		pF
C_{oss}	Output Capacitance			240		pF
C_{rss}	Reverse Transfer Capacitance			106		pF
R_G	Gate Resistance	V_{GS} = 15 mV, f = 1.0 MHz		5.6		Ω
Switching Characteristics (Note 2)						
$t_{d(on)}$	Turn–On Delay Time	V_{DD} = –10 V, I_D = –1 A, V_{GS} = –4.5 V, R_{GEN} = 6 Ω		15	27	ns
t_r	Turn–On Rise Time			15	27	ns
$t_{d(off)}$	Turn–Off Delay Time			40	64	ns
t_f	Turn–Off Fall Time			25	40	ns
Q_g	Total Gate Charge	V_{DS} = –10 V, I_D = –2.4 A, V_{GS} = –4.5 V		12	20	nC
Q_{gs}	Gate–Source Charge			2		nC
Q_{gd}	Gate–Drain Charge			2		nC
Drain–Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain–Source Diode Forward Current				–0.42	A
V_{SD}	Drain–Source Diode Forward Voltage	V_{GS} = 0 V, I_S = –0.42 (Note 2)		–0.6	–1.2	V
t_{rr}	Reverse Recovery Time	I_F = –2.4 A, d_{iF}/d_t = 100 A/μs		18		ns
Q_{rr}	Reverse Recovery Charge			7		nC

OM SENI

Typical Characteristics

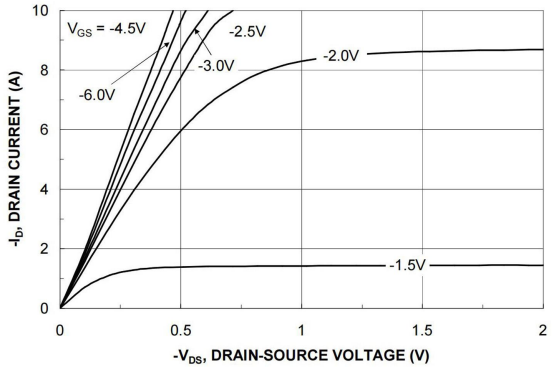


Figure 1. On-Region Characteristics.

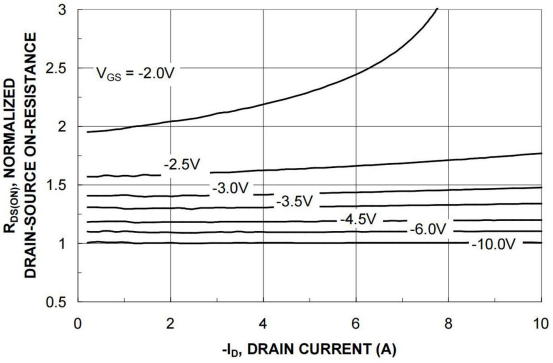


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

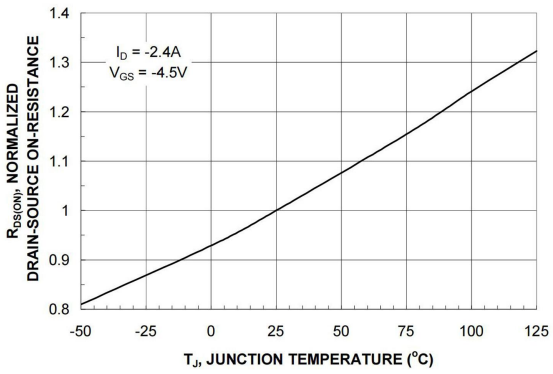


Figure 3. On-Resistance Variation with Temperature.

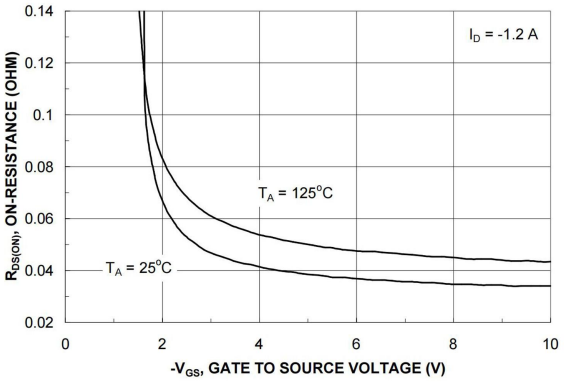


Figure 4. On-Resistance Variation with Gate-to-Source Voltage.

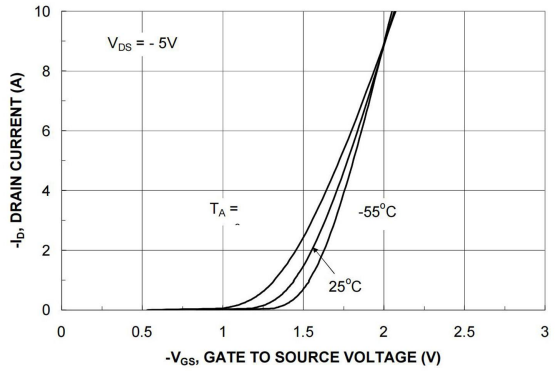


Figure 5. Transfer Characteristics.

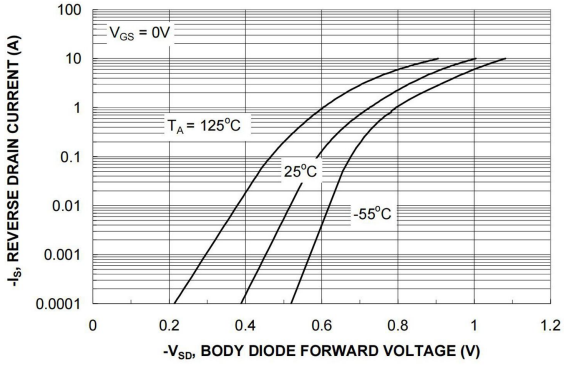


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

OM SENI

Typical Characteristics

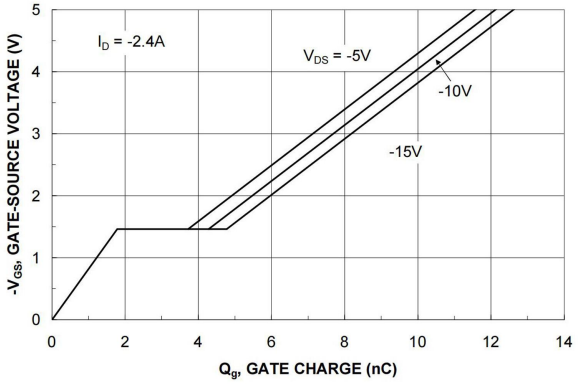


Figure 7. Gate Charge Characteristics.

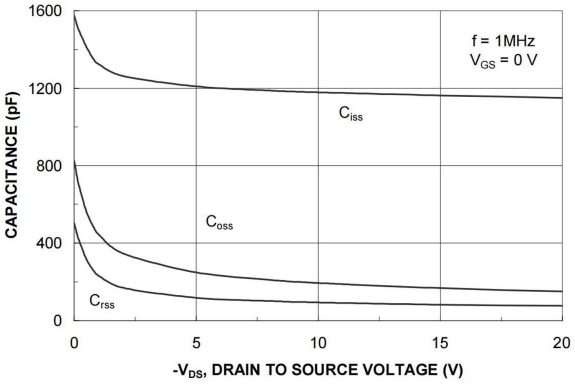


Figure 8. Capacitance Characteristics.

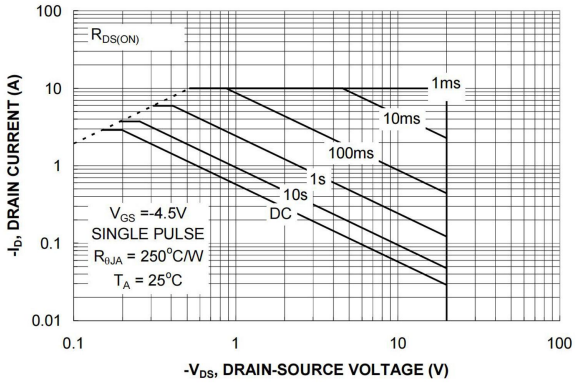


Figure 9. Maximum Safe Operating Area.

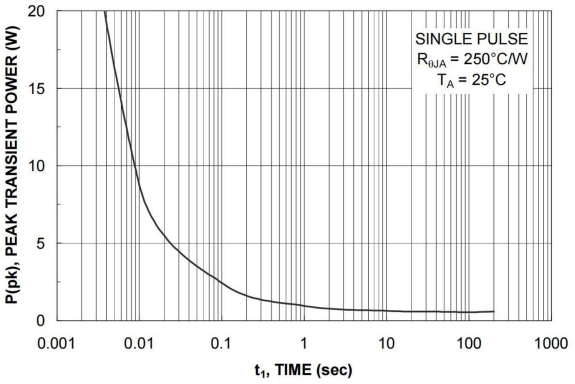


Figure 10. Single Pulse Maximum Power Dissipation.

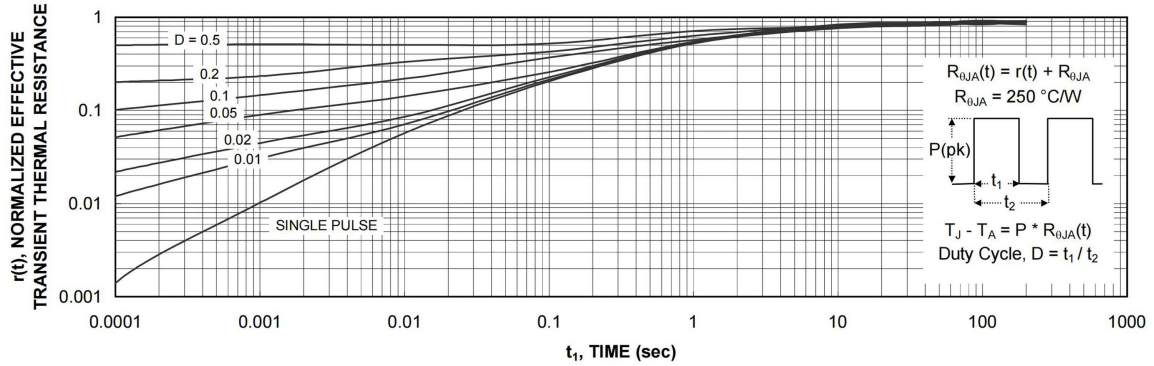



Figure 11. Transient Thermal Response Curve.

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	30000	240000	7''

Package Outline Dimensions (SOT-23)

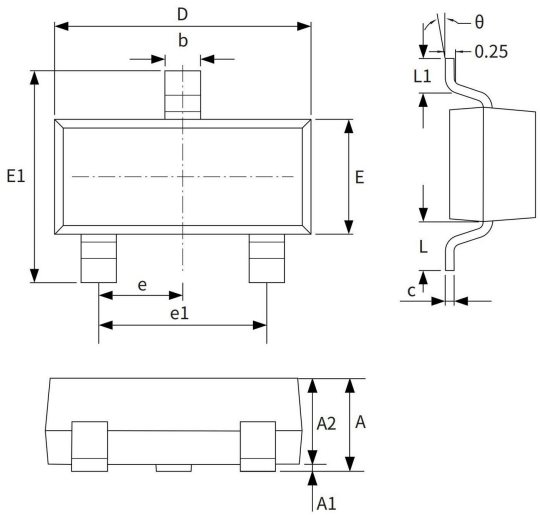

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

Suggested Pad Layout

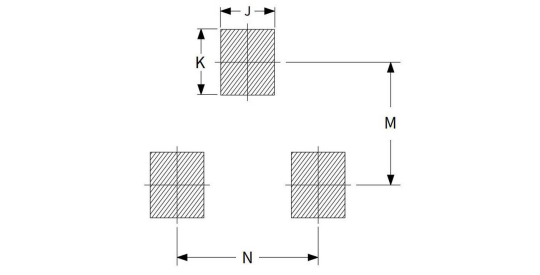

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.75	0.85	0.030	0.033
K	0.85	0.95	0.033	0.037
M	1.95	2.05	0.077	0.081
N	1.85	1.95	0.073	0.077