OM SENI

FDN5632N-F085

N-Channel Logic Level PowerTrench® MOSFET


60 V, 1.6 A, 98 mΩ

Features

- $R_{DS(on)}$ = 98 mΩ at V_{GS} = 4.5 V, I_D = 1.6 A
- $R_{DS(on)}$ = 82 mΩ at V_{GS} = 10 V, I_D = 1.7 A
- Typ $Q_{g(TOT)}$ = 9.2 nC at V_{GS} = 10 V
- Low Miller Charge
- UIS Capability
- Qualified to AEC Q101
- RoHS Compliant


Applications

- DC/DC converter
- Motor Drives



SOT-23

1 – Gate
2 – Source
3 – Drain

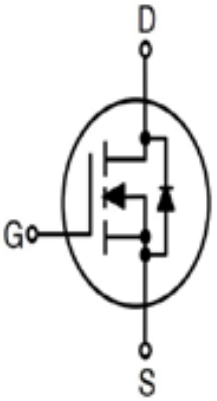

MOSFET Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter	Ratings	Units
V_{DSS}	Drain to Source Voltage	60	V
V_{GS}	Gate to Source Voltage	±20	V
I_D	Drain Current Continuous (V_{GS} = 10V)	1.7	A
	Pulsed	10	
E_{AS}	Single Pulse Avalanche Energy (Note 1)	74	mJ
P_D	Power Dissipation	1.1	W
T_J, T_{STG}	Operating and Storage Temperature	-55 to +150	°C
$R_{\theta JC}$	Thermal Resistance Junction to Case	75	°C/W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient TO-252, 1in^2 copper pad area	111	°C/W

Note:

1: E_{AS} of 74mJ is 100% test at L=80mH, I_{AS}=1.4A, starting T_J = 25 °C

OM SENI

Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
B_{VDSS}	Drain to Source Breakdown Voltage	I_D = 250μA, V_{GS} = 0V	60	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 48V, V_{GS} = 0V	-	-	1	μA
		V_{DS} = 48V, V_{GS} = 0V, T_A = 125°C	-	-	250	
I_{GSS}	Gate to Source Leakage Current	V_{GS} = ±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 250μA	1	2.0	3	V
$r_{DS(on)}$	Drain to Source On Resistance	I_D = 1.7A, V_{GS}= 10V	-	57	82	mΩ
		I_D = 1.6A, V_{GS}= 6V	-	62	88	
		I_D = 1.6A, V_{GS}= 4.5V		70	98	
		I_D = 1.7A, V_{GS}= 10V, T_A = 150°C	-	107	135	
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS} = 15V, V_{GS} = 0V, f = 1MHz	-	475	-	pF
C_{oss}	Output Capacitance		-	60	-	pF
C_{rss}	Reverse Transfer Capacitance		-	30	-	pF
R_G	Gate Resistance	f = 1MHz	-	1.4	-	Ω
$Q_{g(TOT)}$	Total Gate Charge at 10V	V_{GS} = 0 to 10V, V_{DD} = 20V, I_D = 1.7A	-	9.2	12	nC
Q_{gs}	Gate to Source Gate Charge		-	1.5	-	nC
Q_{gd}	Gate to Drain “Miller“ Charge		-	1.4	-	nC

Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Switching Characteristics						
t_{on}	Turn-On Time	V_{DD} = 30V, I_D = 1.0A, V_{GS} = 10V, R_{GEN} = 6Ω	-	-	30	ns
$t_{d(on)}$	Turn-On Delay Time		-	15	-	ns
t_r	Rise Time		-	1.7	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	5.2	-	ns
t_f	Fall Time		-	1.3	-	ns
t_{off}	Turn-Off Time		-	-	12.9	ns
Drain-Source Diode Characteristics						
V_{SD}	Source to Drain Diode Voltage	I_{SD} = 1.7A	-	0.8	1.25	V
		I_{SD} = 0.85A	-	0.8	1.0	
t_{rr}	Reverse Recovery Time	I_{SD} = 1.7A, dI_{SD}/dt = 100A/μs	-	16.0	21	ns
Q_{rr}	Reverse Recovery Charge		-	7.9	10.3	nC

OM SENI

Typical Characteristics

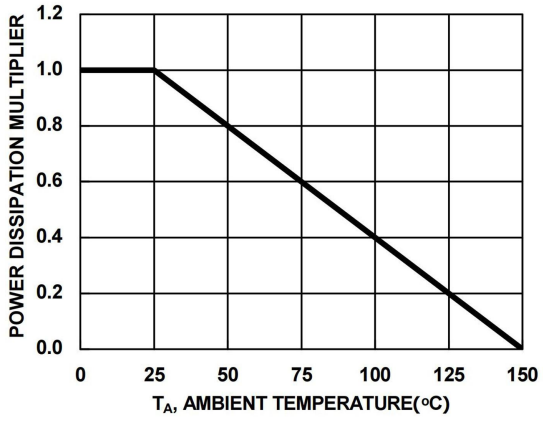


Figure 1. Normalized Power Dissipation vs. Case Temperature

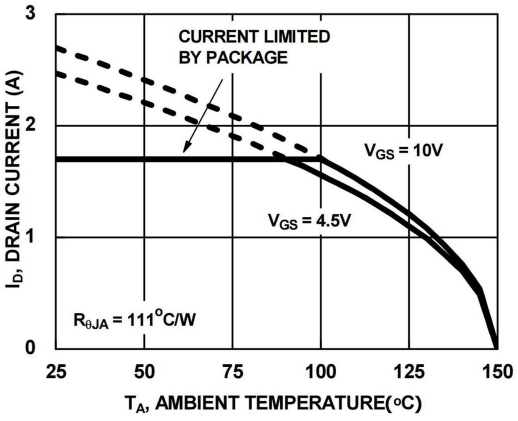


Figure 2. Maximum Continuous Drain Current vs. Case Temperature

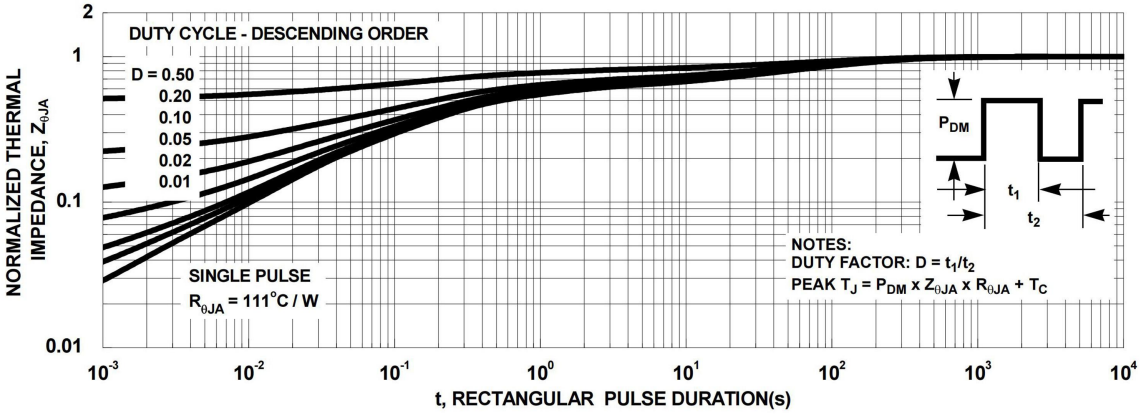


Figure 3. Normalized Maximum Transient Thermal Impedance

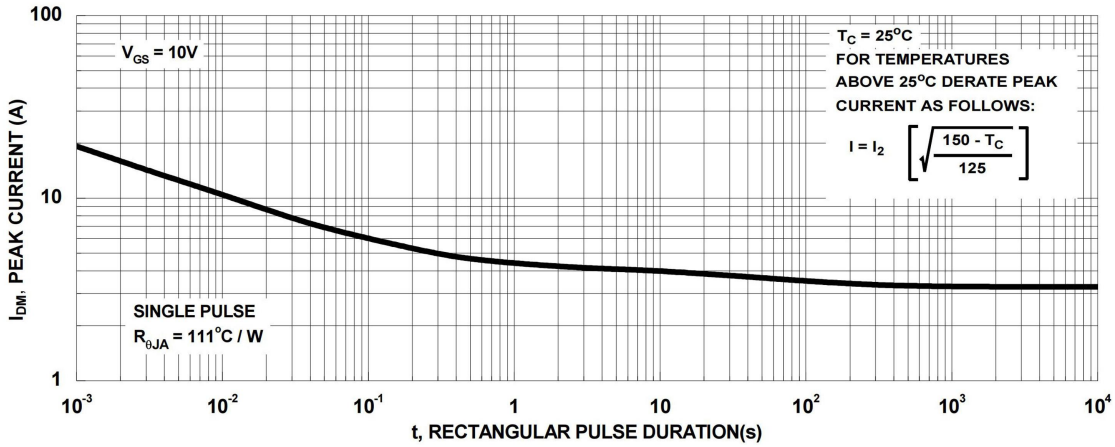


Figure 4. Peak Current Capability

OM SENI

Typical Characteristics

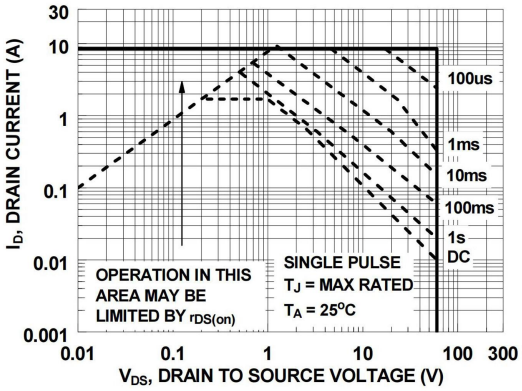


Figure 5. Forward Bias Safe Operating Area

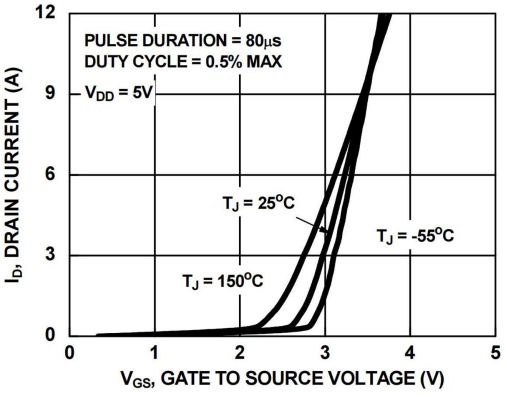


Figure 6. Transfer Characteristics

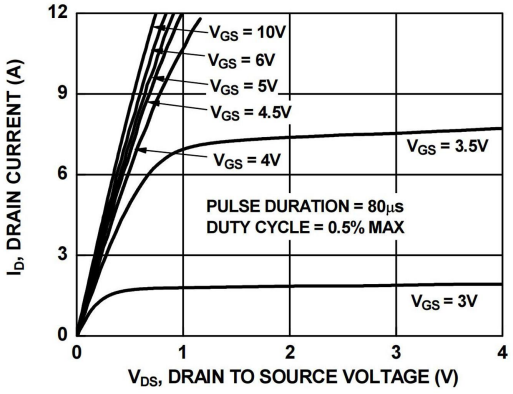


Figure 7. Saturation Characteristics

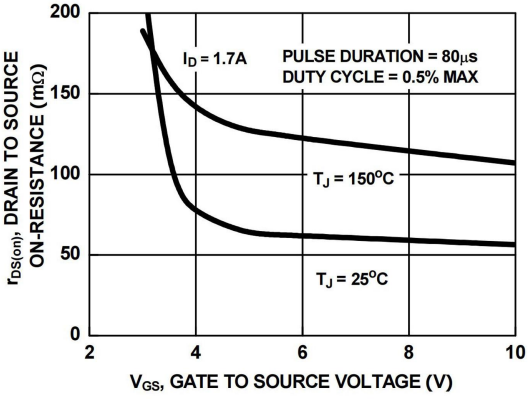


Figure 8. Drain to Source On-Resistance Variation vs Gate to Source Voltage

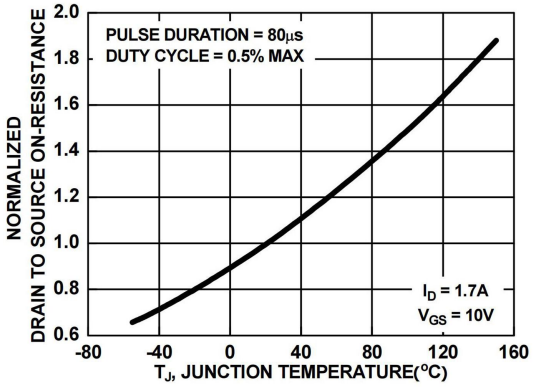


Figure 9. Normalized Drain to Source On Resistance vs Junction Temperature

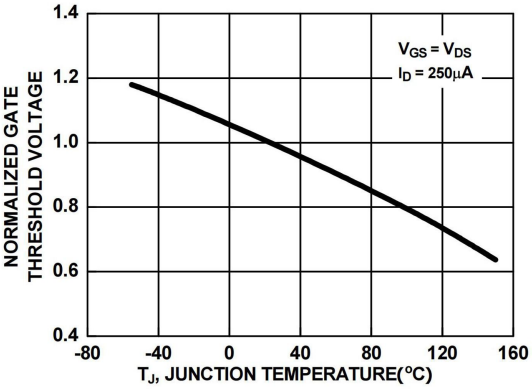


Figure 10. Normalized Gate Threshold Voltage vs Junction Temperature

OM SENI

Typical Characteristics

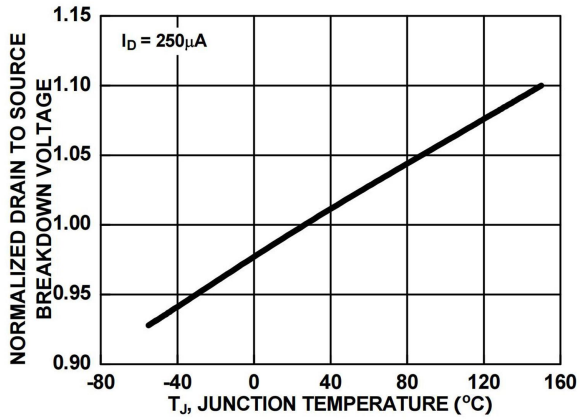


Figure 11. Normalized Drain to Source Breakdown Voltage vs Junction Temperature

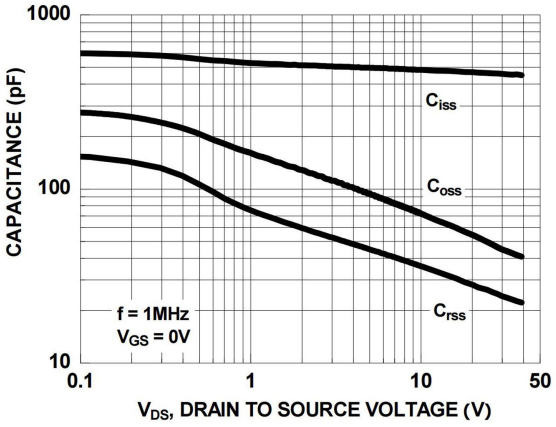


Figure 12. Capacitance vs Drain to Source Voltage

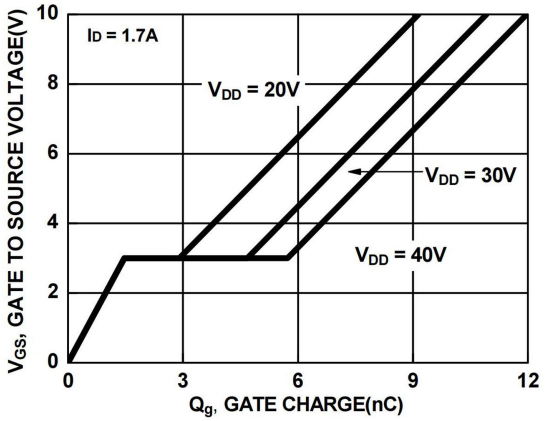



Figure 13. Gate Charge vs Gate to Source Voltage

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	30000	240000	7''

Package Outline Dimensions (SOT-23)

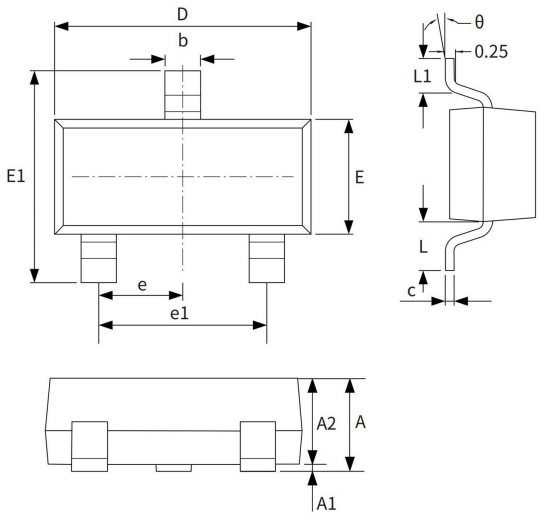

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

Suggested Pad Layout

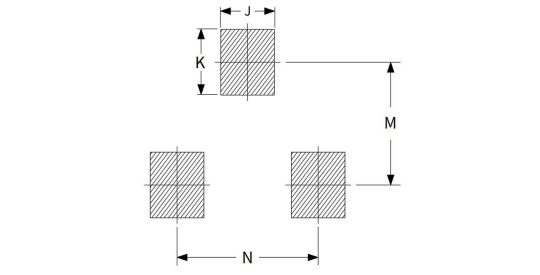

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.75	0.85	0.030	0.033
K	0.85	0.95	0.033	0.037
M	1.95	2.05	0.077	0.081
N	1.85	1.95	0.073	0.077